
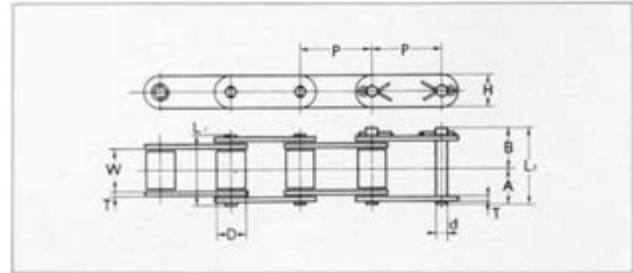
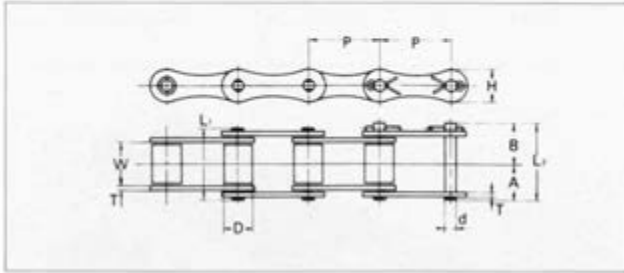


The KCM A and CA type roller chain are mainly employed for power transmission over relative long shaft to shaft distance and used with attachments, especially in large-sized farm machines.

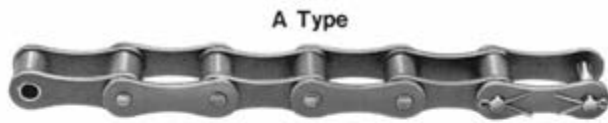

KCM Chain No.	Pitch P	Width between Inner Plates W	Roller Dia. D	PIN						Link Plate		Max. Allowable Load kN (kgf)	Approx. Weight (kg/m)	Links of Dia. 1 unit
				Diameter d	A	B	(A+A) L1	(A+B) L1	Offset L	Thickness T	Height H			
CA550	41.40	20.40	16.66	7.13	17.0	20.55	34.0	37.55	2.6	19.0	4,350 (42.7)	620(6.08)	1.86	240
CA557	41.40	20.40	17.78	8.00	18.7	21.55	37.4	40.25	3.1	22.0	6,200(60.8)	880(8.63)	2.41	
CA620	42.01	25.20	17.68	7.13	20.5	24.05	41.0	44.55	3.1"	19.0	5,200(51.0)	740(7.26)	2.28	

## Straight Side Bar Chain

KCM Chain No.	Pitch P	Width between Inner Plates W	Roller Dia. D	PIN						Link Plate		Max. Allowable Load kN (kgf)	Approx. Weight (kg/m)	Links of Dia. 1 unit
				Diameter d	A	B	(A+A) L1	(A+B) L1	Offset L	Thickness T	Height H			
40 F	12.70	7.95	7.95	3.97	8.02	9.53	16.06	17.55	1.5	12.0	1,800(18.1)	370(3.63)	0.72	240
50 F	15.875	9.53	10.16	5.09	10.15	11.60	20.30	21.75	2.0	14.5	3,050(29.9)	650(6.37)	1.20	192
60 F	19.05	12.70	11.91	5.96	12.65	14.15	25.30	26.80	2.4	17.5	4,200(40.7)	900(8.83)	1.78	160
80 F	25.4	15.88	15.88	7.94	16.07	19.18	32.15	35.25	3.2	23.0	7,400(72.6)	1,500(4.71)	2.97	120
100 F	31.75	19.05	19.05	9.54	20.10	23.05	40.20	43.15	4.0	28.9	11,500(113.3)	2,300(22.56)	4.57	96
120 F	38.10	25.40	22.23	11.11	25.20	28.60	50.40	53.80	4.8	35.0	16,000(156.4)	3,100(30.40)	6.64	80