



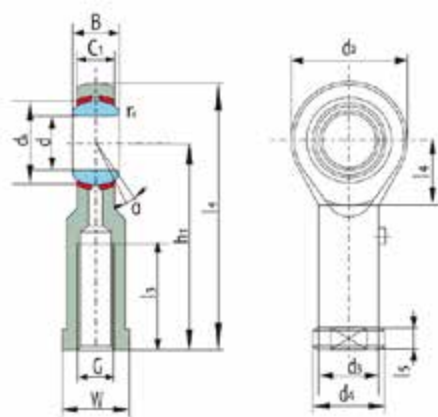

PHS Stainless Steel Series (Metric Female)

Bearing Number	Dimensions (mm)														Load ratings (KN)		Weight (kg)
	d	B	dk	C1	d2	G	h1	L3	L4	L5	W	d3	d4	a° ≈	Dynamic	Static	
SSPHS-5	5	8	11.11	6	16	M5*0.8	27	10	35	4	9	8.5	11	13	3.3	5.7	0.016
SSPHS-6	6	9	12.70	6.75	18	M6*1.0	30	12	39	5	11	10.0	13	13	4.3	7.2	0.022
SSPHS-8	8	12	15.88	9	22	M8*1.25	36	16	47	5	14	12.5	16	14	7.2	11.6	0.047
SSPHS-10	10	14	19.05	10.5	26	M10*1.5	43	20	56	6.5	17	15.0	19	13	10	14.5	0.077
SSPHS-12	12	16	22.23	12	30	M12*1.75	50	22	65	6.5	19	17.5	22	13	13.4	17	0.10
SSPHS-16	16	21	28.58	15	40	M16*2.0	64	28	84	8	24	22.0	27	15	21.6	28.5	0.22
SSPHS-20	20	25	34.93	18	50	M20*1.5	77	33	102	10	30	27.5	34	14	31.5	42.5	0.42

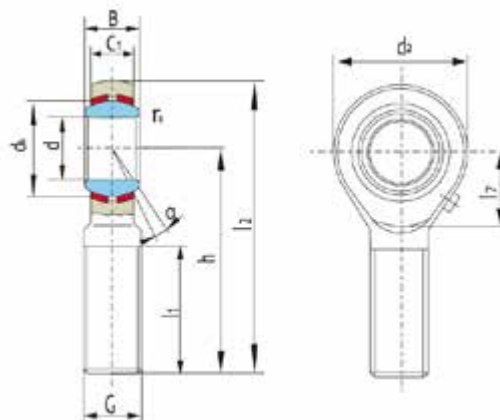

POS Stainless Steel Series (Metric Male)

Bearing Number	Dimensions (mm)											Load ratings (KN)		Weight (kg)
	d	B	dk	C1	d2	G	h	L1	L2	L7	a° ≈	Dynamic	Static	
SSPOS-5	5	8	11.11	6	16	M5*0.8	33	20	41	13	13	3.3	5.7	0.016
SSPOS-6	6	9	12.70	6.75	18	M6*1.0	36	22	45	13	13	4.3	7.2	0.022
SSPOS-8	8	12	15.88	9	22	M8*1.25	42	25	53	14	14	7.2	11.6	0.047
SSPOS-10	10	14	19.05	10.5	26	M10*1.5	48	29	61	13	13	10	14.5	0.077
SSPOS-12	12	16	22.23	12	30	M12*1.75	54	33	69	13	13	10	14.5	0.077
SSPOS-16	16	21	28.58	15	40	M16*2.0	66	40	86	15	13	13.4	17	0.10
SSPOS-20	20	25	34.93	18	50	M20*1.5	78	47	103	14	16	17	24	0.16