



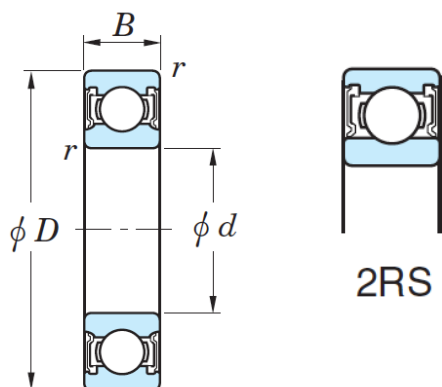

SS RANGE TECHNICAL CHARACTERISTICS

- Stainless Steel
- Standard Radial Play
- Rubber 2RS Shields
- Lubricated



600 Series

Part Number	d (mm)	D (mm)	B (mm)	Load Rating		Limiting Speed (r/min)	Weight (kg)
				Dynamic Load (kN)	Static Load (kN)		
SS605-2RS	5	14	5	1.33	0.505	39000	0.0035
SS606-2RS	6	17	6	1.95	0.72	30000	0.0057
SS607-2RS	7	19	6	2.88	1.08	28000	0.0071
SS608-2RS	8	22	7	3.32	1.38	26000	0.011
SS609-2RS	9	24	7	3.35	1.4	22000	0.014

620 Series

Part Number	d (mm)	D (mm)	B (mm)	Load Rating		Limiting Speed (r/min)	Weight (kg)
				Dynamic Load (kN)	Static Load (kN)		
SS623-2RS	3	14	4	0.5	0.2156	38000	0.0015
SS624-2RS	4	13	5	1.15	0.4	36000	0.0032
SS625-2RS	5	16	5	1.88	0.68	32000	0.0048
SS626-2RS	6	19	6	2.8	1.05	28000	0.0075
SS627-2RS	7	22	7	3.28	1.35	26000	0.012
SS628-2RS	8	24	8	3.35	1.4	24000	0.017
SS629-2RS	9	26	8	4.45	1.95	22000	0.019

680 Series

Part Number	d (mm)	D (mm)	B (mm)	Load Rating		Limiting Speed (r/min)	Weight (kg)
				Dynamic Load (kN)	Static Load (kN)		
SS683-2RS	3	7	3	0.3	0.12	45000	0.00045
SS684-2RS	4	9	4	0.5	0.22	39000	0.0009
SS685-2RS	5	11	5	0.547	0.253	35000	0.0011
SS686-2RS	6	13	5	0.331	0.4	33000	0.0019
SS687-2RS	7	14	5	0.898	0.458	31000	0.0021
SS688-2RS	8	16	4	1.378	0.711	29000	0.0031
SS689-2RS	9	17	5	-	-	-	-

690 Series

Part Number	d (mm)	D (mm)	B (mm)	Load Rating		Limiting Speed (r/min)	Weight (kg)
				Dynamic Load (kN)	Static Load (kN)		
SS694-2RS	4	11	4	0.715	0.276	45000	0.0018
SS695-2RS	5	13	4	1.08	0.42	34000	0.0024
SS696-2RS	6	15	5	1.48	0.6	32000	0.0038
SS697-2RS	7	17	5	2.02	0.8	30000	0.0052
SS698-2RS	8	19	6	2.25	0.92	28000	0.0073
SS699-2RS	9	20	6	2.48	1.08	27000	0.0082