
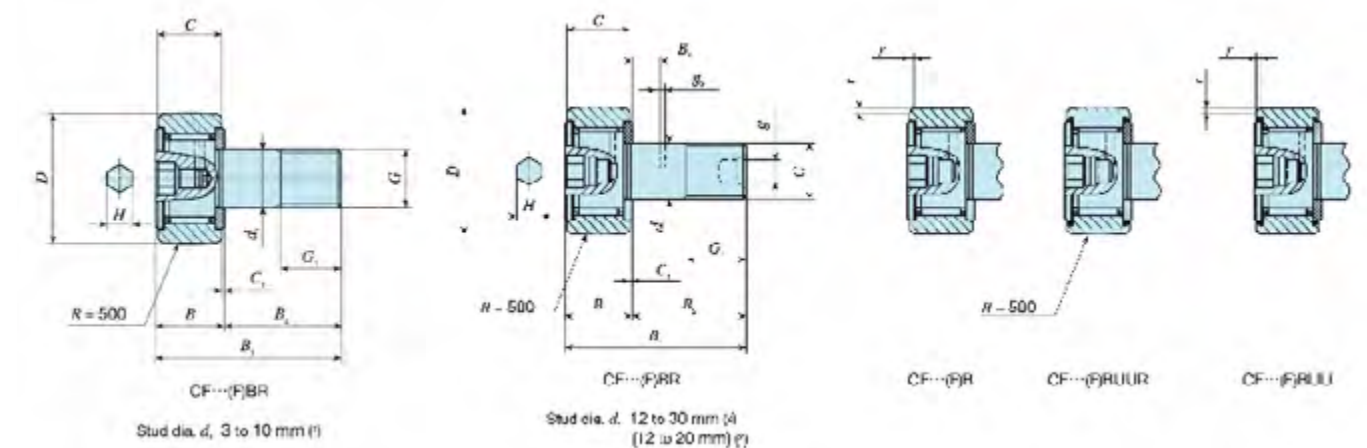


Stainless Steel CF Series

Stainless Steel CF Series

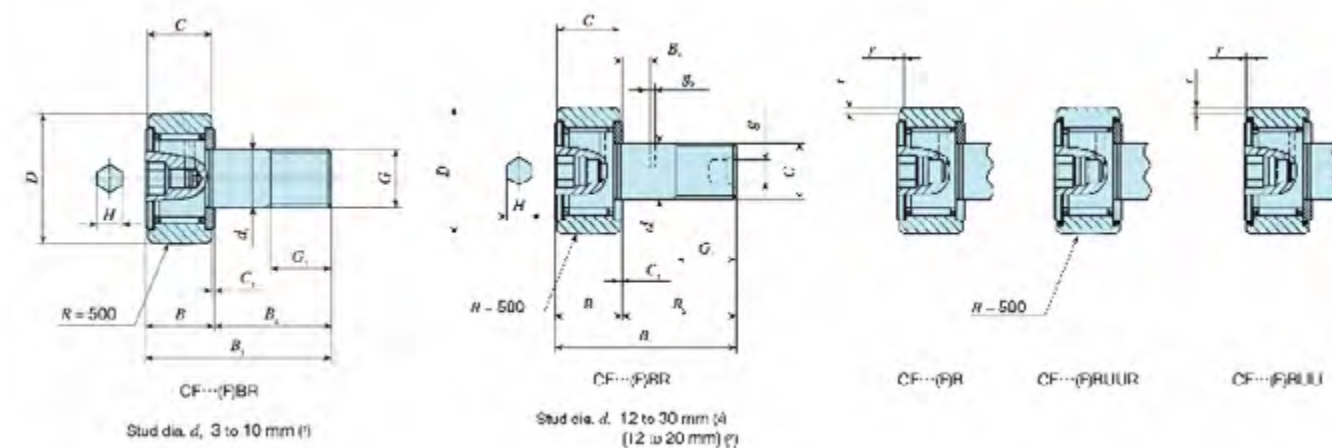

Stud dia. mm	Identification number				Mass (Ref.) g	Dimensions (mm)					Dimensions (mm)								rs min	Mounting dimension f Min. mm	Maximum tightening torque N·m	Basic dynamic load rating C N	Basic static load rating C0 N	Maximum allowable static load N	
	Shield type		Sealed type			D	C	d1	G		G1	B	B1	B2	B3	C1	g1	g2							H
	With crowned outer ring*	With cylindrical outer ring*	With crowned outer ring	With cylindrical outer ring																					
3	CF 3 FBR	CF 3 FB	CF 3 FBUUR	CF 3 FBUU	4.3	10	7	3	M 3×0.5		5	8	17	9	-	0.5	-	-	2	0.2	6.8	0.34	1 200	813	384
5	CF 5 FBR	CF 5 FB	CF 5 FBUUR	CF 5 FBUU	10.3	13	9	5	M 5×0.8		7.5	10	23	13	-	0.5	-	-	3	0.3	9.3	1.6	1 930	1 730	1 260
6	CF 6 FBR	CF 6 FB	CF 6 FBUUR	CF 6 FBUU	18.5	16	11	6	M 6×1		8	12.2 max	28.2 max	16	-	0.6	-	-	3	0.3	11	2.7	2 930	2 920	1 950
8	CF 8 FBR	CF 8 FB	CF 8 FBUUR	CF 8 FBUU	28.5	19	11	8	M 8×1.25		10	12.2 max	32.2 max	20	-	0.6	-	-	4	0.3	13	6.5	3 400	3 790	3 790
10	CF 10 FBR	CF 10 FB	CF 10 FBUUR	CF 8 FBUU	45	22	12	10	M 10×1.25		12	13.2 max	36.2 max	23	-	0.6	-	-	5	0.3	16	13.8	4 340	5 510	5 510
	CF 10-1 FBR	CF 10 FB	CF 10 FBURR	CF 10 FBUU	60	26	12	10	M10x1.25		12	13.2 max	36.2 max	23	-	0.6	-	-	4	0.3	16	13.8	5 430	6 890	6 890
12	CF 12 FBR	CF 12 FB	CF 12 FBUUR	CF 12 FBUU	95	30	14	12	M 12×1.5		13	15.2 max	40.2 max	25	6	0.6	6	3	6	0.6	21	21.9	6 330	7 830	7 830
	CF 12-1 FBR	CF 12-1 FB	CF 12-1 FBURR	CF 12-1 FBUU	105	32	14	12	M12x1.5		13	15.2 max	42.0 max	25	6	0.6	4	3	6	0.6	21	21.9	6 330	7 830	7 830
16	CF 16 FBR	CF 16 FB	CF 16 FBUUR	CF 16 FBUU	170	35	18	16	M 16×1.5		17	19.6 max	52.1 max	32.5	8	0.8	6	3	6	0.6	26	58.5	9 620	14 700	14 700
18	CF 18 FBR	CF 18 FB	CF 18 FBUUR	CF 18 FBUU	250	40	20	18	M 18×1.5		19	21.6 max	58.1 max	36.5	8	0.8	6	3	8	1	29	86.2	11 800	20 200	20 200
20	CF 20 FBR	CF 20 FB	CF 20 FBUUR	CF 20 FBUU	460	52	24	20	M 20×1.5		21	25.6 max	66.1 max	40.5	9	0.8	8	4	8	1	34	119	16 500	27 700	27 700

* Not a stocked range although available on request.

GUIDE

B = Hex
No B = Slotted (Screwdriver)
UU = 2 Rubber Seals
R = Crowned / Spherical
No R = Cylindrical
V = Full Compliment
No V = Caged
F = Stainless Steel