


CF Series - Full Complement (Hex)

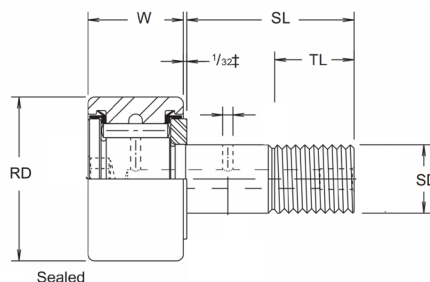

Part No.	Dimensions (inch)						Oil Hole	Grease Hole	Recommended Tightening Torque	Static Load	Dynamic Load
	RD	W	SD	SL	TL	Pitch					
CF-1/2-SB	0.500	0.375	0.190	5/8	1/4	10-32	-	-	15	790	680
CF-5/8-SB	0.625	0.4375	0.250	3/4	5/16	1/4-28	-	-	35	1215	955
CF-3/4-SB	0.750	0.500	0.375	7/8	3/8	3/8-24	3/32	3/16	95	2065	1660
CF-7/8-SB	0.875	0.500	0.375	7/8	3/8	3/8-24	3/32	3/16	95	2065	1660
CF-1-SB	1.000	0.625	0.4375	1	1/2	7/16-20	3/32	3/16	250	3060	2225
CF-1-1/8-SB	1.125	0.625	0.4375	1	1/2	7/16-20	3/32	3/16	250	3060	2225
CF-1-1/4-SB	1.250	0.750	0.500	1 1/4	5/8	1/2-20	3/32	3/16	350	4250	3930
CF-1-3/8-SB	1.375	0.750	0.500	1 1/4	5/8	1/2-20	3/32	3/16	350	4250	3930
CF-1-1/2-SB	1.500	0.875	0.625	1 1/2	3/4	5/8-18	3/32	3/16	650	5640	4840
CF-1-5/8-SB	1.625	0.875	0.625	1 1/2	3/4	5/8-18	3/32	3/16	650	5640	4840
CF-1-3/4-SB	1.750	1.000	0.750	1 3/4	7/8	3/4-16	3/32	3/16	1250	7920	6385
CF-1-7/8-SB	1.875	1.000	0.750	1 3/4	7/8	3/4-16	3/32	3/16	1250	7920	6385
CF-2-SB	2.000	1.250	0.875	2	1	7/8-14	1/8	3/16	1500	10570	8090
CF-2-1/4-SB	2.250	1.250	0.875	2	1	7/8-14	1/8	3/16	1500	10570	8090
CF-2-1/2-SB	2.500	1.500	1.000	2 1/4	1 1/8	1-14	1/8	3/16	2250	16450	11720
CF-2-3/4-SB	2.750	1.500	1.000	2 1/4	1 1/8	1-14	1/8	3/16	2250	16450	11720
CF-3-SB	3.000	1.750	1.250	2 1/2	1 1/4	1 1/4-12	1/8	1/4	3450	24910	15720
CF-3-1/4-SB	3.250	1.750	1.250	2 1/2	1 1/4	1 1/4-12	1/8	1/4	3450	24910	15720
CF-3-1/2-SB	3.500	2.000	1.375	2 3/4	1 3/8	1 3/8-12	1/8	1/4	4200	31625	22800
CF-4-SB	4.000	2.250	1.500	3 1/2	1 1/2	1 1/2-12	1/8	1/4	5000	44770	29985