


High Temperature Ball Bearings



250°C RANGE TECHNICAL CHARACTERISTICS

- 52100 Steel
- C4 Radial Clearance
- Greased for -20°C to 265°C
- 2RS-265°C Vulcanised Rubber Protection

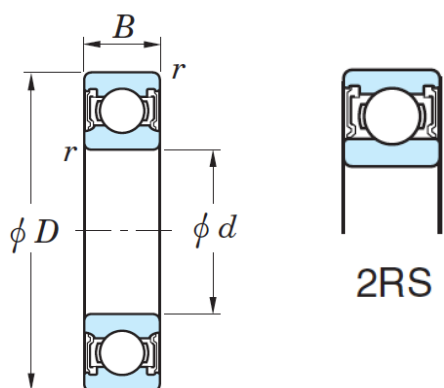

250°C - 600 Series

Part Number	d (mm)	D (mm)	B (mm)	Weight (kg)	Speed Revs/min.	Static Load kN
608-2RS-250°C	8	22	7	-	-	-

250°C - 6000 Series

Part Number	d (mm)	D (mm)	B (mm)	Weight (kg)	Speed Revs/min.	Static Load kN
6000-2RS-250°C	10	26	8	0.022	6000	1.78
6001-2RS-250°C	12	28	8	0.027	5800	2.13
6002-2RS-250°C	15	32	9	0.032	5600	2.53
6003-2RS-250°C	17	35	10	0.043	5400	2.94
6004-2RS-250°C	20	42	12	0.071	5200	5.46
6005-2RS-250°C	25	47	12	0.083	4800	5.14
6006-2RS-250°C	30	55	13	0.125	4400	7.11
6007-2RS-250°C	35	62	14	0.165	4000	9.19
6008-2RS-250°C	40	68	15	0.195	3600	10.47
6009-2RS-250°C	45	75	16	0.255	3200	12.64
6010-2RS-250°C	50	80	16	0.265	2800	13.83
6011-2RS-250°C	55	90	18	-	-	-

250°C - 6200 Series

Part Number	d (mm)	D (mm)	B (mm)	Weight (kg)	Speed Revs/min.	Static Load kN
6200-2RS-250°C	10	30	9	0.032	5800	2.33
6201-2RS-250°C	12	32	10	0.037	5600	2.84
6202-2RS-250°C	15	35	11	0.045	5400	3.35
6203-2RS-250°C	17	40	12	0.065	5200	4.26
6204-2RS-250°C	20	47	14	0.110	4800	5.98
6205-2RS-250°C	25	52	15	0.132	4400	7.11
6206-2RS-250°C	30	62	16	0.200	4000	9.88
6207-2RS-250°C	35	72	17	0.290	3600	13.35
6208-2RS-250°C	40	80	18	0.370	3200	16
6209-2RS-250°C	45	85	19	0.410	2800	18.07
6210-2RS-250°C	50	90	20	0.460	2400	21.33
6211-2RS-250°C	55	100	21	-	-	-
6212-2RS-250°C	60	110	22	-	-	-