


SS RANGE TECHNICAL CHARACTERISTICS

- Stainless Steel
- Standard Radial Play
- Rubber 2RS Shields
- Lubricated





6000 Series

Part Number	d (mm)	D (mm)	B (mm)	Weight (kg)	Speed Revs/min.	Static Load (kN)
SS6000-2RS	10	26	8	0.020	20000	1.61
SS6001-2RS	12	28	8	0.025	16750	1.93
SS6002-2RS	15	32	9	0.030	15500	2.33
SS6003-2RS	17	35	10	0.040	14500	2.66
SS6004-2RS	20	42	12	0.069	13000	4.09
SS6005-2RS	25	47	12	0.080	11000	4.79
SS6006-2RS	30	55	13	0.120	8750	6.55
SS6007-2RS	35	62	14	0.160	7200	8.51
SS6008-2RS	40	68	15	0.190	6500	9.66
SS6009-2RS	45	75	16	0.250	5900	11.7
SS6010-2RS	50	80	16	0.260	5600	12.77
SS6011-2RS	55	90	18	0.390	4900	17.35
SS6012-2RS	60	95	18	0.420	4500	18.93
SS6013-2RS	65	100	18	0.440	4250	20.46
SS6014-2RS	70	110	20	0.600	4000	25.78
SS6015-2RS	75	115	20	0.640	3650	27.83


6200 Series

Part Number	d (mm)	D (mm)	B (mm)	Weight (kg)	Speed Revs/min.	Static Load (kN)
SS6200-2RS	10	30	9	0.036	17120	2.13
SS6201-2RS	12	32	10	0.041	14338	2.54
SS6202-2RS	15	35	11	0.049	13268	3.07
SS6203-2RS	17	40	12	0.069	12412	3.89
SS6204-2RS	20	47	14	0.150	11128	5.36
SS6205-2RS	25	52	15	0.170	9416	6.55
SS6206-2RS	30	62	16	0.240	7490	9.17
SS6207-2RS	35	72	17	0.330	6163	12.52
SS6208-2RS	40	80	18	0.410	5564	14.73
SS6209-2RS	45	85	19	0.460	5050	16.70
SS6210-2RS	50	90	20	0.500	4794	19.64
SS6211-2RS	55	100	21	0.650	4194	23.73
SS6212-2RS	60	110	22	0.820	3852	29.46
SS6213-2RS	65	120	23	0.990	3638	33.96
SS6214-2RS	70	125	24	1.040	3424	36.01
SS6215-2RS	75	130	25	1.210	3124	40.10

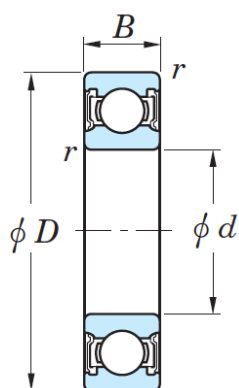

SS RANGE TECHNICAL CHARACTERISTICS

- Stainless Steel
- Standard Radial Play
- Rubber 2RS Shields
- Lubricated



6300 Series

Part Number	d (mm)	D (mm)	B (mm)	Weight (kg)	Speed Revs/min.	Static Load (kN)
SS6300-2RS	10	35	11	0.057	14250	2.82
SS6301-2RS	12	37	12	0.064	12900	3.40
SS6302-2RS	15	42	13	0.086	11600	4.42
SS6303-2RS	17	47	14	0.160	10300	5.67
SS6304-2RS	20	52	15	0.180	9050	6.96
SS6305-2RS	25	62	17	0.270	7100	9.33
SS6306-2RS	30	72	19	0.390	6100	13.34
SS6307-2RS	35	80	21	0.500	5550	15.55
SS6308-2RS	40	90	23	0.670	4900	20.46
SS6309-2RS	45	100	25	0.870	4300	26.19
SS6310-2RS	50	110	27	1.090	3950	31.10
SS6311-2RS	55	124	29	1.390	3425	28.87
SS6312-2RS	60	130	31	1.740	3250	42.56
SS6313-2RS	65	140	33	2.100	2990	49.10
SS6314-2RS	70	150	35	2.500	2825	57.49