

Timing belts made of Polyurethane with steel lacing tension cord and trapezoid formed teeth.

Applications:


Type T2.5: power transmission up to 0.5 kW, electro mechanical design, e.g. film cameras

Type T5: power transmission up to 2 kW, e.g. grinding, kitchen and office machines

Type T10: power transmission up to 20 kW, e.g. textile, printing and tool machines, pumps, compressors, bellows


Finer Power Transmissions stocks a range of Strongbelt sleeves, these are cut to ordered widths.

T2.5 Polyurethane Timing Belts

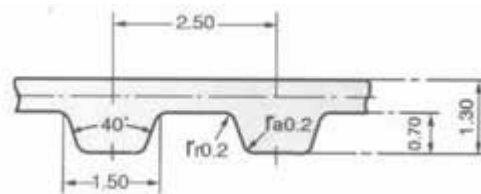

Belt Length	Teeth	Belt Length	Teeth	Belt Length	Teeth	Belt Length	Teeth	Belt Length	Teeth	Belt Length	Teeth
120	48	200	80	277.5	111	330	132	500	200	915	366
145	58	210	84	285	114	342.5	137	540	216	950	380
160	64	230	92	290	116	380	152	600	240		
177.5	71	245	98	305	122	420	168	650	260		
180	72	265	106	317.5	127	480	192	780	312		

T5 Polyurethane Timing Belts

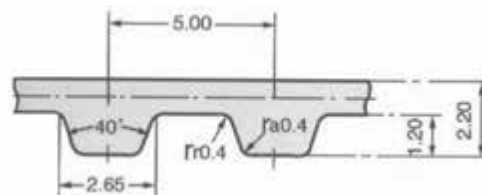

Belt Length	Teeth	Belt Length	Teeth	Belt Length	Teeth	Belt Length	Teeth	Belt Length	Teeth	Belt Length	Teeth
165	33	305	61	430	86	590	118	780	156	1140	228
185	37	320	64	440	88	600	120	800	160	1160	232
200	40	325	65	445	89	610	122	815	163	1200	240
215	43	330	66	450	90	620	124	830	166	1215	243
220	44	340	68	455	91	625	125	840	168	1275	255
225	45	350	70	460	92	630	126	850	170	1280	256
245	49	355	71	475	95	640	128	860	172	1315	263
250	50	360	72	480	96	650	130	885	177	1350	270
255	51	365	73	500	100	660	132	900	180	1355	271
260	52	375	75	510	102	675	135	940	188	1380	276
270	54	390	78	525	105	690	138	990	198	1440	288
275	55	400	80	545	109	700	140	1000	200	1955	-
280	56	410	82	550	110	720	144	1075	215-		
295	59	420	84	560	112	725	145	1100	220		
300	60	425	85	575	115	750	150	1115	223		