



## Small Roller S Type

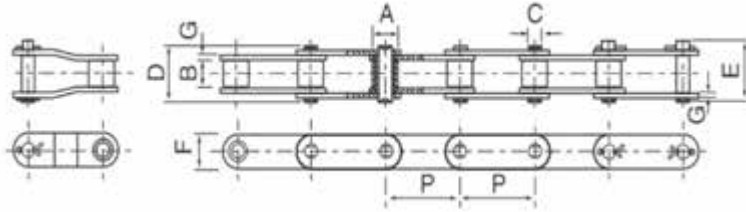

## Large Roller R Type

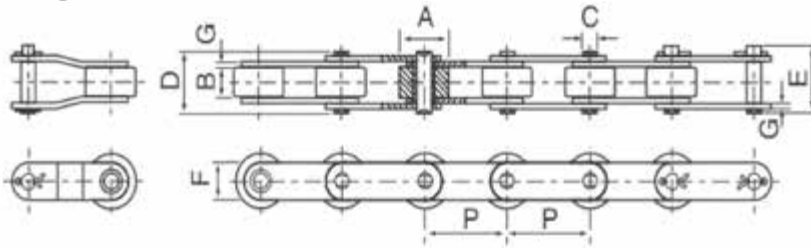

ANSI Chain No.	Pitch		Roller diameter	Width between inner plates	Pin diameter	Pin length		Inner plate height	Plate thickness	Minimum tensile strength	Average tensile strength	Weight per meter				
	P	A				B	C						D	E	F	G
	mm	mm				mm	mm						mm	mm	mm	mm
C2040	25.40	7.95	7.85	3.96	16.60	17.80	12.00	1.50	14.10	16.70	0.50					
C2042H		15.88			18.80	19.90		2.03				17.20	0.65			
C2050	31.75	10.16	9.40	5.08	20.70	22.20	15.00	2.03	22.20	28.10	0.78					
C2052		19.05									1.27					
C2060H	38.10	11.91	12.57	5.94	29.20	31.60	18.00	3.25	31.80	41.60	1.44					
C2062H		22.23									2.07					
C2080H	50.80	15.88	15.75	7.92	36.20	39.40	24.40	4.00	56.70	70.00	2.54					
C2082H		28.58									3.58					
C2100H	63.5	-	18.9	-	-	-	-	-	-	-	-					
C2160H	101.60	28.58	31.75	14.28	67.7	72.9	47.6	6.4	226.8	278.9	8.23					
C2052HPX50FT	31.75	19.05	9.40	5.08	20.70	22.20	15.00	2.03	22.20	28.10	1.27					

## 208B & 212B Chain

DIN ISO Chain No.	Pitch		d1 max	b1 min	d2 max	h2 max	L max	Lc max	Min.T.S	A.T.S	Weight
	mm	mm	mm	mm	mm	mm	mm	mm	kN	kN	kg/m
208B	25.4	1"	8.51	7.75	4.45	11.80	17.00	16.70	18.00	19.40	0.45
212B	38.10	1 1/2"	12.07	11.68	5.72	16.10	22.45	23.40	29.00	32.20	0.78