


## SLR SERIES

### Sintered Steel Bushing

### Maintenance Free - Self Lubricating Chain

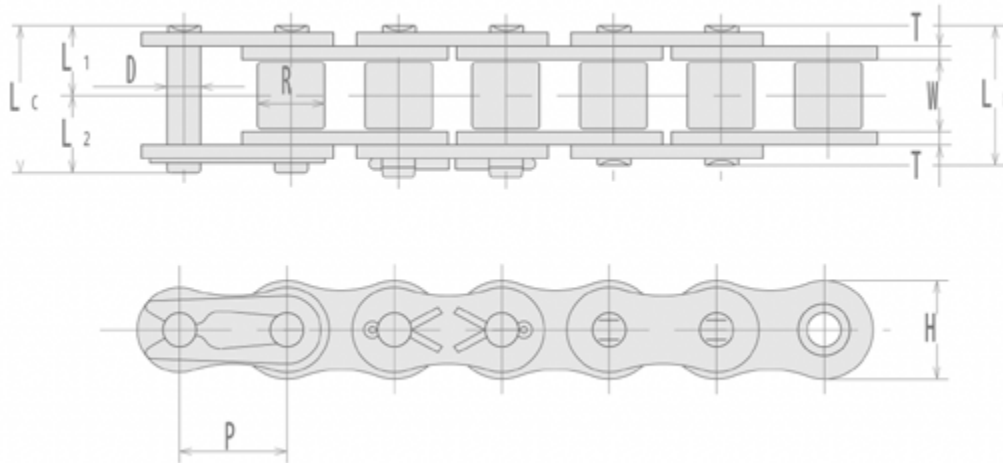

Reduced maintenance costs through oil impregnated sintered steel bush providing self lubrication.  
Ideal for chain drives in industries such as food processing, printing, packaging and textile and materials

SY Chain No. (BS)	Dimensions - mm													Average Ultimate Strength Kn	Maximum Allowable Load kN	Average Chain Weight kg/m
	Pitch	Bushing		Pin				Plate			Trans. Pitch					
		Width	Dia.	Dia.	Length			Height	Thick.							
	P	W	R	D	LR	LC	L1	L2	H	T1	T2	T3	TP			
08B-SLR	12.70	7.75	8.51	4.45	16.7	18.0	8.4	9.6	11.8	1.5	1.5	-	-	16.8	2.9	0.6
10B-SLR	15.875	9.65	10.16	5.08	19.4	20.7	9.7	11.0	14.5	1.65	1.65	-	-	24.6	4.4	0.9
12B-SLR	19.05	11.68	12.07	5.72	22.0	23.6	11.0	12.6	17.4	1.8	1.8	-	-	32.4	6.3	1.1
16B-SLR	25.40	17.02	15.87	8.26	35.2	38.2	17.6	20.6	21.0	3.1	3.9	-	-	74.6	12.2	2.6

SY Chain No. (ANSI)	Dimensions - mm													Average Ultimate Strength Kn	Maximum Allowable Load kN	Average Chain Weight kg/m
	Pitch	Bushing		Pin				Plate			Trans. Pitch					
		Width	Dia.	Dia.	Length			Height	Thick.							
	P	W	R	D	LR	LC	L1	L2	H	T1	T2	TP				
40-SLR	2.70	7.95	7.92	3.96	17.5	19.0	8.6	10.2	11.7	1.5	2.0	-	19.1	3.65	0.7	
50-SLR	15.875	9.53	10.16	5.08	21.3	23.2	10.7	12.6	14.6	2.0	2.4	-	31.9	6.28	1.1	
60-SLR	9.05	12.70	11.91	5.95	27.4	29.8	13.7	16.1	17.5	2.4	3.2	-	43.1	8.63	1.7	
80-SLR	25.40	15.88	15.88	7.03	34.1	37.4	17.1	20.3	23.4	3.2	4.0	-	78.5	14.7	2.7	

