

V-Belts



V-BELTS

Dimensions and Standards	2.1.4
Classical V-Belts	2.1.7
Wedge V-Belts	2.1.8
Cogged (REC) V-Belts	2.1.9
Automotive (Cogged) V-Belts	2.1.10
Automotive (Ribbed) V-Belts	2.1.11
Double Sided V-Belts	2.1.12
FRAS (Fire Resistant Anti Static) V-Belts	2.1.12
Lawn and Garden V-Belts	2.1.13
Poly V-Belts	2.1.14
Banded Belts	2.1.15
Spectra (Centre Corded Raw Edge) V-Belts	2.1.16
Variable Speed V-Belts	2.1.17
Muscle (High Power - Low Maintenance) V-Belts	2.1.18
V-Belt Tensioning	2.1.19
Pulley Gauges	2.1.19
Groove Checking Procedure	2.1.19
Belt Length Measuring Device	2.1.19
Groove Checking Procedure	2.1.19
Belt Tension Tester	2.1.20
Tension Measurement Procedure	2.1.20
Important Notes	2.1.20
Belt Crossover: Narrow & Wedge Belts	2.1.22

WRAPPED V-BELTS

PIX-X_{set}® CLASSICAL BELTS

Section	Dimensions		Angle (Deg)	Pitch width (Wp)	Standard	Min Pulley Dia.(mm)	Manufacturing Range		Belt Length Factor		
	Tw (mm)	Th (mm)					Min Inch/mm	Max Inch/mm	Lp to La (mm)	Li to Lp (mm)	Li to La (mm)
B	8.0	5.0	40	6.7	DIN 2215-1975	40	39/990	174/4420	12	19	31
Z	10.0	6.0	40	8.5	IS 2494, BS 3790, ISO 4184	50	9.5/240	176/4470	16	22	38
A	13.0	8.0	40	11.0	IS 2494, BS 3790, ISO 4184	71	13/330	357/9070	14	36	50
B	17.0	11.0	40	14.0	IS 2494, BS 3790, ISO 4184	112	16/405	900/22860	26	43	69
20	20.0	13.0	40	17.0	DIN 2215-1975	160	31.5/800	900/22860	31	48	79
C	22.0	14.0	40	19.0	IS 2494, BS 3790, ISO 4184	180	31/785	900/22860	32	56	88
25	25.0	16.0	40	21.0	DIN 2215-1975	250	57/1445	900/22860	39	61	100
D	32.0	19.0	40	27.0	IS 2494, BS 3790, ISO 4184	355	44.5/1130	900/22860	40	79	119
E	38.0	23.0	40	32.0	IS 2494	500	90/2285	900/22860	53	92	145

PIX-X_{set}® WEDGE BELTS

Section	Dimensions		Angle (Deg)	Pitch width (Wp)	Standard	Min Pulley Dia.(mm)	Manufacturing Range		Belt Length Factor			Length Designation
	Tw (mm)	Th (mm)					Min Inch/mm	Max Inch/mm	Lp to La (mm)	Li to Lp (mm)	Li to La (mm)	
SPZ	10.0	8.0	40	8.5	BS 3790	63	365mm	4000mm	13	37	50	Lp
SPA	13.0	10.0	40	11.0	BS 3790	90	576mm	9110mm	18	45	63	Lp
SPB	17.0	14.0	40	14.0	BS 3790	140	1000mm	16824mm	28	60	88	Lp
19	19.0	15.0	40	16.0	DIN 7753	180	2253mm	9137mm	25	69	94	Lp
SPC	22.0	18.0	40	19.0	BS 3790	224	1861mm	22943mm	30	83	113	Lp

PIX-X_{set}® NARROW BELTS

Section	Dimensions		Angle (Deg)	Pitch width (Wp)	Standard	Min Pulley Dia. (mm)	Manufacturing Range		Belt Length Factor		
	Tw (mm)	Th (mm)					Min Inch/mm	Max Inch/mm	Lp to La (mm)	Li to Lp (mm)	Li to La (mm)
3V	9.7	8.0	40	9.7	RMA IP 22	63	19.5/495	160/4064	13	37	50
5V	15.8	14.0	40	15.8	RMA IP 22	140	47/1194	657/16688	25	60	85
8V	25.4	23.0	40	25.4	RMA IP 22	335	100/2540	905/22987	53	92	145

PIX-X_{set}® MB BANDED BELTS

Section	Tw (mm)	Th (mm)	Angle (Deg)	Pitch width (Wp)	Standard	Min Pulley Dia. (mm)	Manufacturing Range	Belt Length Factor
HA	13.0 mm	10.0 mm	40	13.0	BS 3790	63	19.5/495	160/4064
HD	17.0 mm	13.0 mm	40	17.0	BS 3790	90	47/1194	657/16688
HC	22.0 mm	16.0 mm	40	22.0	BS 3790	140	100/2540	905/22987
HE	27.0 mm	21.0 mm	40	27.0	BS 3790	224	1861mm	22943mm
HF	32.0 mm	25.0 mm	40	32.0	BS 3790	355	44.5/1130	900/22860
HG	38.0 mm	30.0 mm	40	38.0	BS 3790	500	90/2285	900/22860
HA	13.0 mm	10.0 mm	40	13.0	BS 3790	63	19.5/495	160/4064
HD	17.0 mm	13.0 mm	40	17.0	BS 3790	90	47/1194	657/16688
HC	22.0 mm	16.0 mm	40	22.0	BS 3790	140	100/2540	905/22987
HE	27.0 mm	21.0 mm	40	27.0	BS 3790	224	1861mm	22943mm
HF	32.0 mm	25.0 mm	40	32.0	BS 3790	355	44.5/1130	900/22860
HG	38.0 mm	30.0 mm	40	38.0	BS 3790	500	90/2285	900/22860

PIX-X_{set}® CLASSICAL BELTS

Section	Tw (mm)	Th (mm)	Angle (Deg)	Pitch width (Wp)	Standard	Min Pulley Dia. (mm)	Manufacturing Range	Belt Length Factor
2X	10.0	8.0	38	10.0	BS 3790	63	19.5/495	160/4064
3X	13.0	10.0	38	13.0	BS 3790	90	47/1194	657/16688
4X	17.0	14.0	38	17.0	BS 3790	140	100/2540	905/22987
5X	22.0	18.0	38	22.0	BS 3790	224	1861mm	22943mm

PIX-X_{set}® WEDGE BELTS

Section	Tw (mm)	Th (mm)	Angle (Deg)	Pitch width (Wp)	Standard	Min Pulley Dia. (mm)	Manufacturing Range	Belt Length Factor
WZ	10.0	8.0	38	10.0	BS 3790	63	19.5/495	160/4064
W3	13.0	10.0	38	13.0	BS 3790	90	47/1194	657/16688
W4	17.0	14.0	38	17.0	BS 3790	140	100/2540	905/22987
W5	22.0	18.0	38	22.0	BS 3790	224	1861mm	22943mm

PIX-X_{set}® NARROW BELTS

Section	Tw (mm)	Th (mm)	Angle (Deg)	Pitch width (Wp)	Standard	Min Pulley Dia. (mm)	Manufacturing Range	Belt Length Factor
3V	9.7	8.0	38	9.7	RMA IP 22	63	19.5/495	160/4064
5V	15.8	14.0	38	15.8	RMA IP 22	140	47/1194	657/16688
8V	25.4	23.0	38	25.4	RMA IP 22	335	100/2540	905/22987

PIX-X_{set}® MB BANDED BELTS

Section	Tw (mm)	Th (mm)	Angle (Deg)	Pitch width (Wp)	Standard	Min Pulley Dia. (mm)	Manufacturing Range	Belt Length Factor
HA	13.0	10.0	38	13.0	BS 3790	63	19.5/495	160/4064
HD	17.0	13.0	38	17.0	BS 3790	90	47/1194	657/16688
HC	22.0	16.0	38	22.0	BS 3790	140	100/2540	905/22987
HE	27.0	21.0	38	27.0	BS 3790	224	1861mm	22943mm
HF	32.0	25.0	38	32.0	BS 3790	355	44.5/1130	900/22860
HG	38.0	30.0	38	38.0	BS 3790	500	90/2285	900/22860

RIBBED BELTS

PIX-X'ceed® INDUSTRIAL POLY V-BELTS



					
PH	2.9	1.60	13	280 mm	5080 mm
PJ	3.8	2.34	20	280 mm	5080 mm
PK	4.5	3.56	50	280 mm	5080 mm
PL	7.6	4.70	75	280 mm	5080 mm
PM	13.3	9.40	180	280 mm	5080 mm

PIX-X'ceed® DS DOUBLE SIDED POLY V-BELTS



				
DPK	2 to 13 ribs		1195 mm	3105 mm
DPL	2 to 11 ribs		1200 mm	3105 mm

PIX-X'ceed® EL ELASTICATED POLY V-BELT (PJ)

EL nPJ	2 to 20	600 mm	3105 mm
--------	---------	--------	---------

Note: n = no. of ribs

PIX-X'ceed® HT EPDM POLY V-BELTS

Features:

- Working Temperature up to 130°C.
- Abrasion & Flex cracking resistance is very high.
- Longer service life as compared to regular belts.
- Good dimensional stability.
- Higher power transmission.

Applications:

Automobiles, High Speed Engines.

SPECIAL CONSTRUCTION BELTS

PIX-X'sol® PT-0



							
B (17x14)	17 mm	14 mm	3 mm	85"	858"	Li	
B (17x16)	17 mm	16 mm	5 mm	85"	858"	Li	
A (13x13)	13 mm	13 mm	5 mm	48"	257"	Li	
37 x 25	37 mm	25 mm	5 mm	4084 mm	16713 mm	Lp	

PIX-X'sol® PT-HC HONEY COMB BELTS



						
B (17x17)	17 mm	17 mm	6 mm	32"	658"	Li
C (22x20)	22 mm	20 mm	8 mm	36"	658"	Li

PIX-X'sol® PT-6



							
B (17x22)	17 mm	22 mm	11 mm	85"	375"	Li	
B (17x26)	17 mm	26 mm	15 mm	68"	375"	Li	
B (17x21)	17 mm	21 mm	10 mm	42"	79"	Li	
C (22x25)	22 mm	25 mm	11 mm	73"	350"	Li	

PIX-X'sol® PT-7



						
37(37x25)	37 mm	25 mm	7 mm	4084 mm	8890 mm	Lp
D (32x28)	32 mm	26 mm	7 mm	142"	633"	Li

PIX-X'sol® DS HEXAGONAL BELTS



									
AA	13.0 mm	10.0 mm	40		IS 11038, ISO 5289	80 mm	43"	280"	Li
BB	17.0 mm	14.0 mm	40		IS 11038, ISO 5289	125 mm	40"	660"	Li
CC	22.0 mm	17.0 mm	40		IS 11038, ISO 5289	224 mm	73"	658"	Li
ZS	25.0 mm	22.0 mm	40		PMA IP 21, IS 11038, ISO 5289	280 mm	89"	681"	Li

SPECIAL CONSTRUCTION BELTS

PIX-X'tra[®] HP HIGH POWER BELTS



FEATURES:

- Enhanced power rating by 20% - 30%
- Enhanced belt life
- Minimal belt stretch

PIX-X'tra[®] HP HIGH POWER BELTS



FEATURES:

- High tensile strength
- Low stretch
- Enhanced life

PIX ARAMID / KEVLAR CORD BELTS



FEATURES:

- High tensile strength
- Low stretch
- Enhanced life

PIX-X'tra[®] DS DOUBLE COG BELTS



FEATURES:

- High power transmission capacity
- Better heat dissipation
- Extremely flexible

PIX ASYMMETRIC BELTS



FEATURES:

- Used in torque converter systems
- Used in gold cart, snow mobiles etc.

PIX FRAS BELTS FIRE RESISTANT & ANTISTATIC BELTS



FEATURES:

- Fire resistant belts
- Antistatic
- Certified by ATEX

PIX-X'tra[®] RAW EDGE PLAIN & LAMINATED BELTS



Standard Dimensions & Product Range
See our Raw Edge Plain & Laminated Belts

PIX-X'tra[®] DC DRY COVER BELTS



FEATURES:

- Available in Aramid / Kevlar Cord
- Suitable for drives with clutch applications

LIGHT DUTY SINGLE V-BELTS



Series	TL	4L	5L
Top width (mm)	30	40	50
Thickness (mm)	6	8	10
Angle (deg)	40	40	40
Regular pitch	10.5-102	15.5-152	21.5-202



Series	2LX	3LX	4LX	5LX
Top width (mm)	8	10	13	17
Thickness (mm)	4	6	8	10
Angle (deg)	30	30	30	30
Basic pitch	24-221	24-271	24-302	24-302

PIX MUSCLE HP MF BELTS

PIX-X'tra[®] MUSCLE HP MF



FEATURES:

- High power
- Maintenance free
- REACH compliant
- ECO friendly
- Space saving
- Reduced wear
- Smoother running

RAW EDGE COGGED VARIABLE SPEED BELTS

PIX-X'tra[®] VS VARIABLE SPEED BELTS



V21/6x700-1500	21.0mm	6.0mm	700-1500mm	Li
V28/8x670-1500	28.0mm	8.0mm	670-1500mm	Li
V37/10x800-1800	37.0mm	10.0mm	800-1800mm	Li
V47/13x960-1800	47.0mm	13.0mm	960-1800mm	Li

A SECTION						
A-17	A-36	A-55	A-74	A-93	A-112	A-131
A-18	A-37	A-56	A-75	A-94	A-113	A-132
A-19	A-38	A-57	A-76	A-95	A-114	A-133
A-20	A-39	A-58	A-77	A-96	A-115	A-134
A-21	A-40	A-59	A-78	A-97	A-116	A-135
A-22	A-41	A-60	A-79	A-98	A-117	A-136
A-23	A-42	A-61	A-80	A-99	A-118	A-137
A-24	A-43	A-62	A-81	A-100	A-119	A-138
A-25	A-44	A-63	A-82	A-101	A-120	A-139
A-26	A-45	A-64	A-83	A-102	A-121	A-140
A-27	A-46	A-65	A-84	A-103	A-122	A-142
A-28	A-47	A-66	A-85	A-104	A-123	A-144
A-29	A-48	A-67	A-86	A-105	A-124	A-148
A-30	A-49	A-68	A-87	A-106	A-125	A-150
A-31	A-50	A-69	A-88	A-107	A-126	A-154
A-32	A-51	A-70	A-89	A-108	A-127	A-158
A-33	A-52	A-71	A-90	A-109	A-128	A-160
A-34	A-53	A-72	A-91	A-110	A-129	A-162
A-35	A-54	A-73	A-92	A-111	A-130	A-173
B SECTION						
B-20	B-46	B-72	B-99	B-125	B-154	B-204
B-21	B-47	B-73	B-100	B-126	B-155	B-205
B-22	B-48	B-74	B-101	B-127	B-158	B-210
B-23	B-49	B-75	B-102	B-128	B-160	B-212
B-24	B-50	B-76	B-103	B-129	B-162	B-214
B-25	B-51	B-77	B-104	B-130	B-164	B-215
B-26	B-52	B-78	B-105	B-131	B-166	B-220
B-27	B-53	B-79	B-106	B-132	B-168	B-223
B-28	B-54	B-80	B-107	B-133	B-170	B-225
B-29	B-55	B-81	B-108	B-134	B-172	B-230
B-30	B-56	B-82	B-109	B-135	B-173	B-235
B-31	B-57	B-83	B-110	B-136	B-174	B-236
B-32	B-58	B-84	B-111	B-137	B-175	B-238
B-33	B-59	B-85	B-112	B-138	B-177	B-240
B-34	B-60	B-86	B-113	B-139	B-180	B-255
B-35	B-61	B-87	B-114	B-140	B-184	B-256
B-36	B-62	B-89	B-115	B-142	B-187	B-268
B-37	B-63	B-90	B-116	B-144	B-190	B-270
B-38	B-64	B-91	B-117	B-145	B-193	B-275
B-39	B-65	B-92	B-118	B-146	B-195	B-287
B-40	B-66	B-93	B-119	B-147	B-197	B-290
B-41	B-67	B-94	B-120	B-148	B-199	B-295
B-42	B-68	B-95	B-121	B-150	B-201	B-300
B-43	B-69	B-96	B-122	B-152	B-203	B-394
B-44	B-70	B-97	B-123	B-154	B-206	
B-45	B-71	B-98	B-124	B-156	B-208	
C SECTION						
C-38	C-60	C-82	C-104	C-126	C-162	C-228
C-39	C-61	C-83	C-105	C-127	C-163	C-238
C-40	C-62	C-84	C-106	C-128	C-164	C-240
C-41	C-63	C-85	C-107	C-129	C-166	C-248
C-42	C-64	C-86	C-108	C-130	C-168	C-253
C-43	C-65	C-87	C-109	C-131	C-170	C-255
C-44	C-66	C-88	C-110	C-132	C-173	C-256

C-45	C-67	C-89	C-111	C-133	C-174	C-268
C-46	C-68	C-90	C-112	C-136	C-175	C-270
C-47	C-69	C-91	C-113	C-138	C-176	C-276
C-48	C-70	C-92	C-114	C-140	C-178	C-280
C-49	C-71	C-93	C-115	C-142	C-180	C-286
C-50	C-72	C-94	C-116	C-144	C-185	C-298
C-51	C-73	C-95	C-117	C-146	C-190	C-300
C-52	C-74	C-96	C-118	C-148	C-195	C-328
C-53	C-75	C-97	C-119	C-150	C-204	C-330
C-54	C-76	C-98	C-120	C-152	C-210	C-337
C-55	C-77	C-99	C-121	C-153	C-215	C-358
C-56	C-78	C-100	C-122	C-154	C-216	C-360
C-57	C-79	C-101	C-123	C-156	C-223	C-376
C-58	C-80	C-102	C-124	C-158	C-224	C-418
C-59	C-81	C-103	C-125	C-160	C-225	
D SECTION						
D-94	D-136	D-169	D-215	D-260	D-313	D-420
D-97	D-144	D-173	D-220	D-268	D-314	D-475
D-101	D-148	D-175	D-226	D-270	D-330	D-480
D-110	D-150	D-180	D-237	D-275	D-360	D-510
D-112	D-158	D-195	D-240	D-285	D-390	
D-120	D-160	D-206	D-246	D-286	D-410	
D-128	D-162	D-210	D-250	D-300	D-418	
E SECTION						
E-147	E-195	E-240	E-300	E-360	E-440	E-540
E-180	E-210	E-270	E-340	E-420	E-470	
M SECTION						
M-15	M-23	M-31	M-39	M-47	M-55	M-63
M-16	M-24	M-32	M-40	M-48	M-56	M-64
M-17	M-25	M-33	M-41	M-49	M-57	M-65
M-18	M-26	M-34	M-42	M-50	M-58	M-66
M-19	M-27	M-35	M-43	M-51	M-59	
M-20	M-28	M-36	M-44	M-52	M-60	
M-21	M-29	M-37	M-45	M-53	M-61	
M-22	M-30	M-38	M-46	M-54	M-62	

SPA SECTION									
SPA-775	SPA-1060	SPA-1307	SPA-1557	SPA-1782	SPA-2060	SPA-2360	SPA-2800	SPA-3750	
SPA-800	SPA-1082	SPA-1320	SPA-1582	SPA-1800	SPA-2082	SPA-2382	SPA-2832	SPA-3900	
SPA-825	SPA-1090	SPA-1332	SPA-1600	SPA-1832	SPA-2120	SPA-2430	SPA-2882	SPA-4000	
SPA-832	SPA-1120	SPA-1357	SPA-1607	SPA-1850	SPA-2132	SPA-2432	SPA-2900	SPA-4250	
SPA-850	SPA-1150	SPA-1360	SPA-1632	SPA-1857	SPA-2150	SPA-2450	SPA-2932	SPA-4500	
SPA-875	SPA-1157	SPA-1382	SPA-1650	SPA-1882	SPA-2180	SPA-2500	SPA-2982	SPA-4700	
SPA-900	SPA-1160	SPA-1400	SPA-1657	SPA-1900	SPA-2182	SPA-2532	SPA-3000		
SPA-925	SPA-1180	SPA-1407	SPA-1660	SPA-1907	SPA-2200	SPA-2580	SPA-3100		
SPA-950	SPA-1200	SPA-1450	SPA-1682	SPA-1932	SPA-2207	SPA-2582	SPA-3150		
SPA-975	SPA-1207	SPA-1457	SPA-1700	SPA-1950	SPA-2232	SPA-2607	SPA-3182		
SPA-982	SPA-1220	SPA-1482	SPA-1725	SPA-1957	SPA-2240	SPA-2632	SPA-3270		
SPA-1000	SPA-1250	SPA-1500	SPA-1732	SPA-2000	SPA-2282	SPA-2650	SPA-3282		
SPA-1030	SPA-1280	SPA-1532	SPA-1750	SPA-2032	SPA-2300	SPA-2682	SPA-3350		
SPA-1032	SPA-1300	SPA-1550	SPA-1757	SPA-2057	SPA-2332	SPA-2732	SPA-3550		
SPB SECTION									
SPB-1250	SPB-1520	SPB-1850	SPB-2200	SPB-2450	SPB-2900	SPB-3450	SPB-4500	SPB-5680	SPB-8500
SPB-1260	SPB-1525	SPB-1900	SPB-2240	SPB-2500	SPB-2950	SPB-3550	SPB-4560	SPB-5990	SPB-9000
SPB-1320	SPB-1540	SPB-1950	SPB-2280	SPB-2530	SPB-2990	SPB-3650	SPB-4750	SPB-6000	
SPB-1340	SPB-1590	SPB-2000	SPB-2310	SPB-2580	SPB-3000	SPB-3750	SPB-4820	SPB-6300	
SPB-1400	SPB-1600	SPB-2020	SPB-2330	SPB-2640	SPB-3070	SPB-3800	SPB-5000	SPB-6340	
SPB-1410	SPB-1650	SPB-2030	SPB-2360	SPB-2650	SPB-3150	SPB-3870	SPB-5070	SPB-6700	
SPB-1430	SPB-1690	SPB-2060	SPB-2400	SPB-2680	SPB-3170	SPB-4000	SPB-5300	SPB-7100	
SPB-1450	SPB-1700	SPB-2120	SPB-2410	SPB-2800	SPB-3250	SPB-4060	SPB-5310	SPB-7500	
SPB-1500	SPB-1750	SPB-2150	SPB-2430	SPB-2840	SPB-3300	SPB-4250	SPB-5380	SPB-7900	
SPB-1510	SPB-1800	SPB-2180	SPB-2440	SPB-2850	SPB-3350	SPB-4310	SPB-5600	SPB-8000	
SPC SECTION									
SPC-2000	SPC-2360	SPC-2800	SPC-3350	SPC-4250	SPC-5600	SPC-7000	SPC-8500	SPC-11200	SPC-16500
SPC-2025	SPC-2380	SPC-3000	SPC-3550	SPC-4500	SPC-6000	SPC-7100	SPC-9000	SPC-11800	
SPC-2100	SPC-2500	SPC-3100	SPC-3750	SPC-4750	SPC-6300	SPC-7250	SPC-9500	SPC-12500	
SPC-2120	SPC-2650	SPC-3150	SPC-3780	SPC-5000	SPC-6500	SPC-7500	SPC-10000	SPC-13500	
SPC-2240	SPC-2750	SPC-3300	SPC-4000	SPC-5300	SPC-6700	SPC-8000	SPC-10600	SPC-13800	
SPZ SECTION									
SPZ-562	SPZ-800	SPZ-975	SPZ-1112	SPZ-1262	SPZ-1420	SPZ-1600	SPZ-1887	SPZ-2187	SPZ-2990
SPZ-570	SPZ-812	SPZ-987	SPZ-1120	SPZ-1270	SPZ-1437	SPZ-1637	SPZ-1900	SPZ-2240	SPZ-3000
SPZ-587	SPZ-825	SPZ-1000	SPZ-1140	SPZ-1280	SPZ-1450	SPZ-1650	SPZ-1937	SPZ-2250	SPZ-3150
SPZ-612	SPZ-837	SPZ-1010	SPZ-1150	SPZ-1287	SPZ-1462	SPZ-1662	SPZ-1987	SPZ-2280	SPZ-3170
SPZ-630	SPZ-850	SPZ-1024	SPZ-1162	SPZ-1300	SPZ-1470	SPZ-1687	SPZ-2000	SPZ-2287	SPZ-3550
SPZ-670	SPZ-862	SPZ-1030	SPZ-1180	SPZ-1312	SPZ-1487	SPZ-1700	SPZ-2030	SPZ-2360	
SPZ-687	SPZ-875	SPZ-1037	SPZ-1187	SPZ-1320	SPZ-1500	SPZ-1750	SPZ-2037	SPZ-2410	
SPZ-710	SPZ-900	SPZ-1047	SPZ-1190	SPZ-1340	SPZ-1520	SPZ-1762	SPZ-2060	SPZ-2500	
SPZ-737	SPZ-912	SPZ-1060	SPZ-1200	SPZ-1360	SPZ-1537	SPZ-1787	SPZ-2087	SPZ-2540	
SPZ-750	SPZ-925	SPZ-1077	SPZ-1220	SPZ-1362	SPZ-1560	SPZ-1800	SPZ-2120	SPZ-2650	
SPZ-760	SPZ-940	SPZ-1080	SPZ-1237	SPZ-1387	SPZ-1562	SPZ-1837	SPZ-2137	SPZ-2690	
SPZ-775	SPZ-950	SPZ-1090	SPZ-1240	SPZ-1400	SPZ-1575	SPZ-1850	SPZ-2140	SPZ-2800	
SPZ-787	SPZ-962	SPZ-1100	SPZ-1250	SPZ-1412	SPZ-1587	SPZ-1862	SPZ-2160	SPZ-2840	



Cogged (REC) V-Belts



Finer Power Transmissions P/L | www.finerpt.com

AX SECTION											
AX-20	AX-27	AX-34	AX-41	AX-48	AX-55	AX-62	AX-69	AX-76	AX-83	AX-90	AX-97
AX-21	AX-28	AX-35	AX-42	AX-49	AX-56	AX-63	AX-70	AX-77	AX-84	AX-91	AX-98
AX-22	AX-29	AX-36	AX-43	AX-50	AX-57	AX-64	AX-71	AX-78	AX-85	AX-92	AX-99
AX-23	AX-30	AX-37	AX-44	AX-51	AX-58	AX-65	AX-72	AX-79	AX-86	AX-93	AX-100
AX-24	AX-31	AX-38	AX-45	AX-52	AX-59	AX-66	AX-73	AX-80	AX-87	AX-94	AX-105
AX-25	AX-32	AX-39	AX-46	AX-53	AX-60	AX-67	AX-74	AX-81	AX-88	AX-95	AX-136
AX-26	AX-33	AX-40	AX-47	AX-54	AX-61	AX-68	AX-75	AX-82	AX-89	AX-96	AX-144
BX SECTION											
BX-24	BX-32	BX-40	BX-48	BX-56	BX-64	BX-72	BX-80	BX-88	BX-96	BX-112	
BX-25	BX-33	BX-41	BX-49	BX-57	BX-65	BX-73	BX-81	BX-89	BX-97	BX-115	
BX-26	BX-34	BX-42	BX-50	BX-58	BX-66	BX-74	BX-82	BX-90	BX-98	BX-118	
BX-27	BX-35	BX-43	BX-51	BX-59	BX-67	BX-75	BX-83	BX-91	BX-99	BX-120	
BX-28	BX-36	BX-44	BX-52	BX-60	BX-68	BX-76	BX-84	BX-92	BX-100	BX-124	
BX-29	BX-37	BX-45	BX-53	BX-61	BX-69	BX-77	BX-85	BX-93	BX-103	BX-133	
BX-30	BX-38	BX-46	BX-54	BX-62	BX-70	BX-78	BX-86	BX-94	BX-105	BX-144	
BX-31	BX-39	BX-47	BX-55	BX-63	BX-71	BX-79	BX-87	BX-95	BX-108	BX-180	
CX SECTION											
CX-42	CX-51	CX-60	CX-70	CX-78	CX-87	CX-105	CX-116	CX-136	CX-173		
CX-45	CX-56	CX-62	CX-72	CX-81	CX-90	CX-108	CX-120	CX-144	CX-180		
CX-46	CX-57	CX-65	CX-75	CX-83	CX-96	CX-109	CX-125	CX-158			
CX-48	CX-58	CX-68	CX-76	CX-85	CX-100	CX-110	CX-128	CX-166			
XPA SECTION											
XPA-630	XPA-925	XPA-1090	XPA-1232	XPA-1400	XPA-1600	XPA-1900	XPA-2240	XPA-3000			
XPA-800	XPA-950	XPA-1120	XPA-1250	XPA-1430	XPA-1650	XPA-1950	XPA-2360	XPA-3150			
XPA-825	XPA-975	XPA-1140	XPA-1280	XPA-1450	XPA-1700	XPA-2000	XPA-2500	XPA-3350			
XPA-850	XPA-1000	XPA-1150	XPA-1320	XPA-1500	XPA-1750	XPA-2060	XPA-2580	XPA-3550			
XPA-875	XPA-1030	XPA-1180	XPA-1357	XPA-1532	XPA-1800	XPA-2120	XPA-2650				
XPA-900	XPA-1060	XPA-1220	XPA-1360	XPA-1550	XPA-1850	XPA-2180	XPA-2800				
XPB SECTION											
XPB-1000	XPB-1270	XPB-1450	XPB-1650	XPB-1850	XPB-2060	XPB-2280	XPB-2610	XPB-3000	XPB-3550	XPB-4250	
XPB-1120	XPB-1320	XPB-1500	XPB-1690	XPB-1900	XPB-2120	XPB-2360	XPB-2650	XPB-3150	XPB-3750	XPB-4500	
XPB-1180	XPB-1340	XPB-1550	XPB-1700	XPB-1950	XPB-2150	XPB-2410	XPB-2680	XPB-3170	XPB-3800	XPB-4750	
XPB-1250	XPB-1400	XPB-1590	XPB-1750	XPB-2000	XPB-2180	XPB-2500	XPB-2800	XPB-3250	XPB-4000	XPB-4820	
XPB-1260	XPB-1410	XPB-1600	XPB-1800	XPB-2020	XPB-2240	XPB-2530	XPB-2840	XPB-3350	XPB-4060		
XPC SECTION											
XPC-2000	XPC-2240	XPC-2500	XPC-2800	XPC-3150	XPC-3550	XPC-4000	XPC-4500	XPC-4900			
XPC-2120	XPC-2360	XPC-2650	XPC-3000	XPC-3350	XPC-3750	XPC-4250	XPC-4750				
XPZ SECTION											
XPZ-610	XPZ-760	XPZ-875	XPZ-980	XPZ-1090	XPZ-1220	XPZ-1320	XPZ-1470	XPZ-1600	XPZ-1850	XPZ-2280	
XPZ-612	XPZ-772	XPZ-900	XPZ-1000	XPZ-1120	XPZ-1240	XPZ-1340	XPZ-1500	XPZ-1637	XPZ-1900	XPZ-2410	
XPZ-630	XPZ-800	XPZ-910	XPZ-1010	XPZ-1140	XPZ-1250	XPZ-1360	XPZ-1520	XPZ-1650	XPZ-1950	XPZ-2650	
XPZ-670	XPZ-825	XPZ-925	XPZ-1030	XPZ-1150	XPZ-1262	XPZ-1400	XPZ-1525	XPZ-1700	XPZ-2000	XPZ-3000	
XPZ-710	XPZ-830	XPZ-940	XPZ-1060	XPZ-1180	XPZ-1270	XPZ-1420	XPZ-1550	XPZ-1750	XPZ-2030		
XPZ-750	XPZ-850	XPZ-950	XPZ-1080	XPZ-1200	XPZ-1280	XPZ-1450	XPZ-1560	XPZ-1800	XPZ-2160		

10A SECTION									
10A-550	10A-650	10A-675	10A-750						
11A SECTION									
11A-545	11A-760	11A-875	11A-965	11A-1065	11A-1140	11A-1230	11A-1345	11A-1475	11A-1675
11A-610	11A-775	11A-890	11A-980	11A-1070	11A-1145	11A-1245	11A-1360	11A-1485	11A-1700
11A-650	11A-785	11A-900	11A-990	11A-1075	11A-1155	11A-1255	11A-1370	11A-1500	11A-1725
11A-660	11A-800	11A-915	11A-1005	11A-1080	11A-1165	11A-1270	11A-1385	11A-1510	11A-1780
11A-685	11A-815	11A-920	11A-1015	11A-1090	11A-1170	11A-1285	11A-1395	11A-1525	
11A-710	11A-825	11A-925	11A-1030	11A-1095	11A-1180	11A-1295	11A-1410	11A-1550	
11A-725	11A-840	11A-940	11A-1040	11A-1105	11A-1195	11A-1310	11A-1420	11A-1560	
11A-735	11A-850	11A-950	11A-1055	11A-1120	11A-1205	11A-1320	11A-1450	11A-1575	
11A-750	11A-865	11A-955	11A-1060	11A-1130	11A-1220	11A-1335	11A-1460	11A-1600	
13A SECTION									
13A-620	13A-815	13A-940	13A-1040	13A-1130	13A-1230	13A-1325	13A-1425	13A-1575	13A-1755
13A-660	13A-825	13A-950	13A-1050	13A-1135	13A-1245	13A-1335	13A-1435	13A-1585	13A-1780
13A-675	13A-840	13A-955	13A-1055	13A-1140	13A-1250	13A-1345	13A-1440	13A-1590	13A-1805
13A-700	13A-850	13A-965	13A-1060	13A-1145	13A-1255	13A-1350	13A-1450	13A-1600	13A-1830
13A-735	13A-865	13A-975	13A-1065	13A-1150	13A-1260	13A-1370	13A-1460	13A-1625	13A-1840
13A-750	13A-870	13A-980	13A-1070	13A-1155	13A-1270	13A-1375	13A-1475	13A-1640	13A-1855
13A-760	13A-875	13A-990	13A-1080	13A-1170	13A-1275	13A-1385	13A-1485	13A-1650	13A-1880
13A-775	13A-890	13A-1000	13A-1090	13A-1175	13A-1285	13A-1390	13A-1500	13A-1665	13A-1980
13A-785	13A-900	13A-1005	13A-1100	13A-1180	13A-1295	13A-1395	13A-1525	13A-1675	
13A-795	13A-915	13A-1015	13A-1105	13A-1195	13A-1300	13A-1400	13A-1535	13A-1690	
13A-800	13A-920	13A-1020	13A-1120	13A-1205	13A-1310	13A-1410	13A-1550	13A-1700	
13A-810	13A-925	13A-1030	13A-1125	13A-1220	13A-1320	13A-1420	13A-1560	13A-1725	

15A SECTION									
15A-815	15A-980	15A-1080	15A-1155	15A-1230	15A-1305	15A-1370	15A-1495	15A-1645	
15A-850	15A-1005	15A-1085	15A-1160	15A-1235	15A-1310	15A-1385	15A-1500	15A-1665	
15A-865	15A-1015	15A-1100	15A-1170	15A-1245	15A-1320	15A-1410	15A-1535	15A-1685	
15A-870	15A-1030	15A-1105	15A-1175	15A-1255	15A-1325	15A-1415	15A-1540	15A-1690	
15A-875	15A-1040	15A-1110	15A-1180	15A-1260	15A-1335	15A-1450	15A-1575	15A-1715	
15A-890	15A-1055	15A-1125	15A-1195	15A-1270	15A-1340	15A-1465	15A-1585	15A-1740	
15A-925	15A-1060	15A-1130	15A-1205	15A-1285	15A-1355	15A-1480	15A-1590	15A-1755	
15A-965	15A-1065	15A-1145	15A-1220	15A-1290	15A-1360	15A-1485	15A-1640	15A-1830	
17A SECTION									
17A-640	17A-925	17A-1030	17A-1140	17A-1210	17A-1795				
17A-800	17A-1015	17A-1065	17A-1160	17A-1625					
20A SECTION									
20A-990	20A-1055	20A-1130	20A-1200	20A-1275	20A-1310	20A-1360	20A-1475		
20A-1020	20A-1075	20A-1155	20A-1220	20A-1295	20A-1325	20A-1395	20A-1500		
20A-1045	20A-1090	20A-1180	20A-1250	20A-1305	20A-1335	20A-1435	20A-1525		

3PK SECTION (3 RIBS)										
3PK-620	3PK-735	3PK-815	3PK-825	3PK-855	3PK-880	3PK-895	3PK-915	3PK-1055		
3PK-635	3PK-760	3PK-820	3PK-835	3PK-875	3PK-890	3PK-900	3PK-990	3PK-1080		
4PK SECTION (4 RIBS)										
4PK-600	4PK-685	4PK-790	4PK-830	4PK-865	4PK-900	4PK-945	4PK-980	4PK-1040	4PK-1100	4PK-1195
4PK-605	4PK-700	4PK-800	4PK-835	4PK-875	4PK-910	4PK-950	4PK-990	4PK-1050	4PK-1120	4PK-1245
4PK-615	4PK-735	4PK-805	4PK-845	4PK-880	4PK-915	4PK-955	4PK-1000	4PK-1065	4PK-1130	4PK-1325
4PK-620	4PK-760	4PK-810	4PK-850	4PK-885	4PK-925	4PK-960	4PK-1005	4PK-1070	4PK-1145	4PK-1360
4PK-635	4PK-775	4PK-815	4PK-855	4PK-890	4PK-935	4PK-970	4PK-1015	4PK-1080	4PK-1180	
4PK-640	4PK-785	4PK-825	4PK-860	4PK-895	4PK-940	4PK-975	4PK-1030	4PK-1090	4PK-1190	
5PK SECTION (5 RIBS)										
5PK-710	5PK-825	5PK-870	5PK-910	5PK-965	5PK-1010	5PK-1060	5PK-1110	5PK-1170	5PK-1240	5PK-1325
5PK-716	5PK-840	5PK-875	5PK-915	5PK-975	5PK-1015	5PK-1065	5PK-1120	5PK-1195	5PK-1245	5PK-1345
5PK-725	5PK-850	5PK-880	5PK-925	5PK-980	5PK-1030	5PK-1080	5PK-1135	5PK-1205	5PK-1280	5PK-1385
5PK-785	5PK-855	5PK-890	5PK-940	5PK-990	5PK-1040	5PK-1100	5PK-1145	5PK-1210	5PK-1300	5PK-1750
5PK-820	5PK-865	5PK-900	5PK-955	5PK-1000	5PK-1055	5PK-1105	5PK-1165	5PK-1220	5PK-1320	
6PK SECTION (6 RIBS)										
6PK-825	6PK-1095	6PK-1195	6PK-1540	6PK-1750	6PK-2070	6PK-2225	6PK-2335	6PK-2415	6PK-2590	6PK-2830
6PK-870	6PK-1105	6PK-1215	6PK-1555	6PK-1790	6PK-2155	6PK-2230	6PK-2345	6PK-2500	6PK-2685	6PK-2845
6PK-1015	6PK-1107	6PK-1300	6PK-1575	6PK-1855	6PK-2160	6PK-2240	6PK-2350	6PK-2510	6PK-2690	
6PK-1019	6PK-1110	6PK-1320	6PK-1590	6PK-1885	6PK-2170	6PK-2275	6PK-2370	6PK-2515	6PK-2720	
6PK-1035	6PK-1130	6PK-1385	6PK-1625	6PK-1900	6PK-2190	6PK-2285	6PK-2375	6PK-2530	6PK-2725	
6PK-1050	6PK-1165	6PK-1460	6PK-1650	6PK-1980	6PK-2200	6PK-2300	6PK-2380	6PK-2553	6PK-2805	
6PK-1065	6PK-1180	6PK-1510	6PK-1660	6PK-1995	6PK-2205	6PK-2315	6PK-2385	6PK-2555	6PK-2810	
6PK-1080	6PK-1190	6PK-1515	6PK-1740	6PK-2020	6PK-2210	6PK-2325	6PK-2405	6PK-2580	6PK-2825	
7PK SECTION (7 RIBS)										
7PK-990	7PK-1275	7PK-1515	7PK-1580	7PK-1590	7PK-1640	7PK-1925	7PK-1935	7PK-2120	7PK-2415	7PK-2875
8PK SECTION (8 RIBS)										
8PK-915	8PK-1285	8PK-1400	8PK-1485	8PK-1575	8PK-1640	8PK-1700	8PK-1820	8PK-1930	8PK-2130	
8PK-955	8PK-1295	8PK-1425	8PK-1500	8PK-1590	8PK-1650	8PK-1725	8PK-1830	8PK-1955	8PK-2172	
8PK-1180	8PK-1345	8PK-1435	8PK-1530	8PK-1600	8PK-1660	8PK-1740	8PK-1855	8PK-1965	8PK-2325	
8PK-1230	8PK-1365	8PK-1460	8PK-1535	8PK-1615	8PK-1675	8PK-1755	8PK-1900	8PK-1980	8PK-2415	
8PK-1255	8PK-1385	8PK-1475	8PK-1550	8PK-1625	8PK-1690	8PK-1805	8PK-1910	8PK-2060	8PK-2630	
9PK SECTION (9 RIBS)										
9PK-2010	9PK-2250									
10PK SECTION (10 RIBS)										
10PK-1470	10PK-1875	10PK-1880	10PK-2055	10PK-2060						
12PK SECTION (12 RIBS)										
12PK-2215	12PK-2290	12PK-2315	12PK-2367	12PK-2380	12PK-2489					

DOUBLE SIDED A SECTION

AA-51	AA-66	AA-72	AA-77	AA-86	AA-102	AA-112
AA-55	AA-67	AA-73	AA-80	AA-90	AA-105	AA-120
AA-60	AA-71	AA-75	AA-85	AA-96	AA-108	

DOUBLE SIDED B SECTION

BB-41	BB-72	BB-93	BB-110	BB-132	BB-173	
BB-45	BB-73	BB-94	BB-112	BB-136	BB-180	
BB-51	BB-75	BB-96	BB-117	BB-144	BB-190	
BB-55	BB-81	BB-97	BB-118	BB-150	BB-195	
BB-60	BB-85	BB-100	BB-120	BB-155	BB-199	
BB-68	BB-88	BB-102	BB-123	BB-158	BB-210	
BB-70	BB-90	BB-105	BB-128	BB-162	BB-270	
BB-71	BB-92	BB-108	BB-130	BB-168		

DOUBLE SIDED C SECTION

CC-81	CC-104	CC-120	CC-144	CC-162	CC-195	CC-240
CC-90	CC-105	CC-128	CC-148	CC-164	CC-210	CC-360
CC-96	CC-112	CC-140	CC-158	CC-180		

FRAS (Fire Resistant Anti Static) V-Belts

A FRAS SECTION

A24-FRAS	A34-FRAS	A43-FRAS	A51-FRAS	A59-FRAS	A67-FRAS	A80-FRAS
A25-FRAS	A36-FRAS	A44-FRAS	A52-FRAS	A60-FRAS	A68-FRAS	A85-FRAS
A26-FRAS	A37-FRAS	A45-FRAS	A53-FRAS	A61-FRAS	A69-FRAS	A90-FRAS
A27-FRAS	A38-FRAS	A46-FRAS	A54-FRAS	A62-FRAS	A70-FRAS	
A30-FRAS	A39-FRAS	A47-FRAS	A55-FRAS	A63-FRAS	A72-FRAS	
A31-FRAS	A40-FRAS	A48-FRAS	A56-FRAS	A64-FRAS	A74-FRAS	
A32-FRAS	A41-FRAS	A49-FRAS	A57-FRAS	A65-FRAS	A75-FRAS	
A33-FRAS	A42-FRAS	A50-FRAS	A58-FRAS	A66-FRAS	A79-FRAS	

B FRAS SECTION

B31-FRAS	B40-FRAS	B48-FRAS	B56-FRAS	B67-FRAS	B80-FRAS	B112-FRAS
B32-FRAS	B42-FRAS	B49-FRAS	B57-FRAS	B68-FRAS	B81-FRAS	B117-FRAS
B33-FRAS	B43-FRAS	B50-FRAS	B59-FRAS	B69-FRAS	B92-FRAS	B131-FRAS
B34-FRAS	B44-FRAS	B52-FRAS	B60-FRAS	B71-FRAS	B93-FRAS	B144-FRAS
B35-FRAS	B45-FRAS	B53-FRAS	B62-FRAS	B74-FRAS	B100-FRAS	
B36-FRAS	B46-FRAS	B54-FRAS	B63-FRAS	B75-FRAS	B103-FRAS	
B38-FRAS	B47-FRAS	B55-FRAS	B64-FRAS	B77-FRAS	B105-FRAS	

C FRAS SECTION

C52-FRAS	C64-FRAS	C85-FRAS	C112-FRAS	C125-FRAS	C173-FRAS	C240-FRAS
C57-FRAS	C68-FRAS	C90-FRAS	C120-FRAS	C144-FRAS	C222-FRAS	C276-FRAS
C63-FRAS	C81-FRAS	C96-FRAS				

AK (KEVLAR) SECTION

AK19	AK33	AK47	AK61	AK75	AK89	AK103	AK117	AK131	AK145
AK20	AK34	AK48	AK62	AK76	AK90	AK104	AK118	AK132	AK146
AK21	AK35	AK49	AK63	AK77	AK91	AK105	AK119	AK133	AK147
AK22	AK36	AK50	AK64	AK78	AK92	AK106	AK120	AK134	AK148
AK23	AK37	AK51	AK65	AK79	AK93	AK107	AK121	AK135	AK149
AK24	AK38	AK52	AK66	AK80	AK94	AK108	AK122	AK136	AK150
AK25	AK39	AK53	AK67	AK81	AK95	AK109	AK123	AK137	AK151
AK26	AK40	AK54	AK68	AK82	AK96	AK110	AK124	AK138	AK152
AK27	AK41	AK55	AK69	AK83	AK97	AK111	AK125	AK139	AK153
AK28	AK42	AK56	AK70	AK84	AK98	AK112	AK126	AK140	AK154
AK29	AK43	AK57	AK71	AK85	AK99	AK113	AK127	AK141	AK156
AK30	AK44	AK58	AK72	AK86	AK100	AK114	AK128	AK142	AK158
AK31	AK45	AK59	AK73	AK87	AK101	AK115	AK129	AK143	AK160
AK32	AK46	AK60	AK74	AK88	AK102	AK116	AK130	AK144	AK162

BK (KEVLAR) SECTION

BK25	BK39	BK53	BK67	BK81	BK95	BK109	BK123	BK137	BK157
BK26	BK40	BK54	BK68	BK82	BK96	BK110	BK124	BK138	BK158
BK27	BK41	BK55	BK69	BK83	BK97	BK111	BK125	BK139	BK159
BK28	BK42	BK56	BK70	BK84	BK98	BK112	BK126	BK140	BK160
BK29	BK43	BK57	BK71	BK85	BK99	BK113	BK127	BK141	BK162
BK30	BK44	BK58	BK72	BK86	BK100	BK114	BK128	BK142	BK164
BK31	BK45	BK59	BK73	BK87	BK101	BK115	BK129	BK143	BK166
BK32	BK46	BK60	BK74	BK88	BK102	BK116	BK130	BK144	BK168
BK33	BK47	BK61	BK75	BK89	BK103	BK117	BK131	BK146	BK170
BK34	BK48	BK62	BK76	BK90	BK104	BK118	BK132	BK148	BK172
BK35	BK49	BK63	BK77	BK91	BK105	BK119	BK133	BK150	BK173
BK36	BK50	BK64	BK78	BK92	BK106	BK120	BK134	BK152	BK175
BK37	BK51	BK65	BK79	BK93	BK107	BK121	BK135	BK154	BK178
BK38	BK52	BK66	BK80	BK94	BK108	BK122	BK136	BK156	BK180
									BK300

MK (KEVLAR) SECTION

MK19	MK24	MK27	MK30	MK33	MK36	MK39	MK42	MK45	
MK22	MK25	MK28	MK31	MK34	MK37	MK40	MK43		
MK23	MK26	MK29	MK32	MK35	MK38	MK41	MK44		

OEM KEVLAR SECTION

A-265025	A-265494	A-37X57	A-37X86	A-7540355	AK-37X65	MTD-7540281		
A-265124	A-300680	A-37X61	A-37X88	AK-265793	AK-37X74	MTD-7540329A		
A-265488	A-37X40	A-37X62	A-7540280	AK-37X63	AK-7540371A	SPA-DRY-K-2625		

J-SECTION (POLY-V BELTS - MULTI RIBBED BELTS)

METRIC NUMBER		IMPERIAL NUMBER	METRIC NUMBER		IMPERIAL NUMBER	METRIC NUMBER		IMPERIAL NUMBER
J -	286	112	J -	711	280	J -	1270	500
J -	305	120	J -	723	285	J -	1285	506
J -	330	130	J -	762	300	J -	1290	508
J -	343	135	J -	787	310	J -	1321	520
J -	360	140	J -	813	320	J -	1355	533
J -	381	150	J -	838	330	J -	1397	550
J -	406	160	J -	864	340	J -	1475	581
J -	432	170	J -	914	360	J -	1549	610
J -	450	177	J -	965	380	J -	1600	630
J -	457	180	J -	991	390	J -	1651	650
J -	483	190	J -	1016	400	J -	1752	690
J -	508	200	J -	1041	410	J -	1854	730
J -	533	210	J -	1092	430	J -	1956	770
J -	559	220	J -	1168	460	J -	2083	820
J -	584	230	J -	1200	472	J -	2210	870
J -	610	240	J -	1244	490	J -	2337	920
J -	660	260				J -	2489	980

L-SECTION (POLY-V BELTS - MULTI RIBBED BELTS)

METRIC NUMBER		IMPERIAL NUMBER	METRIC NUMBER		IMPERIAL NUMBER	METRIC NUMBER		IMPERIAL NUMBER
L -	1270	500	L -	1981	780	L -	2705	1065
L -	1295	510	L -	2020	795	L -	2921	1150
L -	1397	550	L -	2070	815	L -	2997	1180
L -	1422	560	L -	2095	825	L -	3086	1215
L -	1562	615	L -	2134	840	L -	3124	1230
L -	1613	635	L -	2197	865	L -	3289	1295
L -	1664	655	L -	2235	880	L -	3696	1455
L -	1715	675	L -	2324	915	L -	4051	1595
L -	1764	694	L -	2362	930	L -	4470	1760
L -	1803	710	L -	2476	975			
L -	1841	725	L -	2515	990			
L -	1943	765						



A SECTION	B SECTION		C SECTION	D SECTION	SPB SECTION	SPC SECTION	3V SECTION	5V SECTION	8V SECTION
HA-40	HB-55	HB-99	HC-78	HD-195	HSPB-1750	HSPC-2800	H3V-400	H5V-600	H8V-2500
HA-42	HB-57	HB-102	HC-90		HSPB-1800	HSPC-3000	H3V-425	H5V-710	H8V-2360/2
HA-62	HB-60	HB-103	HC-96		HSPB-1900	HSPC-3150	H3V-450	H5V-850	
HA-102	HB-62	HB-105	HC-108		HSPB-2000	HSPC-3350	H3V-475	H5V-900	
	HB-64	HB-106	HC-112		HSPB-2120	HSPC-3550	H3V-500	H5V-1000	
	HB-65	HB-107	HC-120		HSPB-2240	HSPC-3750	H3V-530	H5V-1040	
	HB-66	HB-108	HC-124		HSPB-2360	HSPC-4000	H3V-600	H5V-1060	
	HB-68	HB-112	HC-128		HSPB-2500	HSPC-4250	H3V-670	H5V-1120	
	HB-71	HB-116	HC-144		HSPB-2650	HSPC-4500	H3V-710	H5V-1250	
	HB-72	HB-120	HC-152		HSPB-2800	HSPC-4750	H3V-800	H5V-1320	
	HB-73	HB-124	HC-158		HSPB-3000	HSPC-5000	H3V-850	H5V-1400	
	HB-75	HB-128	HC-180		HSPB-3150	HSPC-5600	H3V-1250	H5V-1500	
	HB-76	HB-132	HC-185		HSPB-3350	HSPC-6000	H3V-1320	H5V-1600	
	HB-77	HB-136	HC-195		HSPB-3550	HSPC-6300	H3V-1400	H5V-1700	
	HB-80	HB-140	HC-204		HSPB-3750	HSPC-6700	H3V-1600	H5V-2000	
	HB-81	HB-144			HSPB-4000	HSPC-7100		H5V-2240	
	HB-82	HB-152			HSPB-4250	HSPC-7500		H5V-2650	
	HB-83	HB-154			HSPB-4500	HSPC-9500		H5V-3000	
	HB-85	HB-158			HSPB-4750			H5V-3550	
	HB-87	HB-162			HSPB-5000				
	HB-88	HB-166							
	HB-92	HB-173							
	HB-93	HB-180							
	HB-95	HB-188							
	HB-96	HB-190							
	HB-97	HB-195							
		HB-210							



Spectra (Centre Corded Raw Edge) V-Belts



Finer Power Transmissions P/L | www.finerpt.com

A-SECTION

A24S	A40S	A56S	A72S	A88S	A112S
A25S	A41S	A57S	A73S	A89S	A120S
A26S	A42S	A58S	A74S	A90S	A124S
A27S	A43S	A59S	A75S	A91S	A128S
A28S	A44S	A60S	A76S	A92S	A136S
A29S	A45S	A61S	A77S	A93S	A144S
A30S	A46S	A62S	A78S	A94S	A148S
A31S	A47S	A63S	A79S	A95S	A150S
A32S	A48S	A64S	A80S	A96S	A154S
A33S	A49S	A65S	A81S	A97S	A158S
A34S	A50S	A66S	A82S	A98S	A164S
A35S	A51S	A67S	A83S	A100S	A173S
A36S	A52S	A68S	A84S	A102S	A180S
A37S	A53S	A69S	A85S	A103S	
A38S	A54S	A70S	A86S	A105S	
A39S	A55S	A71S	A87S	A110S	

B-SECTION

B24S	B41S	B57S	B73S	B89S	B108S	B154S
B26S	B42S	B58S	B74S	B90S	B112S	B158S
B27S	B43S	B59S	B75S	B91S	B115S	B162S
B28S	B44S	B60S	B76S	B92S	B116S	B173S
B29S	B45S	B61S	B77S	B93S	B118S	B191S
B30S	B46S	B62S	B78S	B94S	B120S	B195S
B31S	B47S	B63S	B79S	B95S	B123S	
B32S	B48S	B64S	B80S	B96S	B124S	
B33S	B49S	B65S	B81S	B97S	B126S	
B34S	B50S	B66S	B82S	B98S	B128S	
B35S	B51S	B67S	B83S	B99S	B133S	
B36S	B52S	B68S	B84S	B100S	B136S	
B37S	B53S	B69S	B85S	B101S	B140S	
B38S	B54S	B70S	B86S	B103S	B144S	
B39S	B55S	B71S	B87S	B105S	B148S	
B40S	B56S	B72S	B88S	B106S	B150S	



METHOD OF ORDERING

21	6	700
Top Width (mm)	Tooth Depth (mm)	Inside Length (mm)

VARIABLE SPEED BELTS

21 X 6 X 700	21 X 6 X 1185	28 X 8 X 900	28 X 8 X 1500	37 X 10 X 1320	47 X 13 X 1180
21 X 6 X 750	21 X 6 X 1250	28 X 8 X 950	37 X 10 X 800	37 X 10 X 1400	47 X 13 X 1250
21 X 6 X 800	21 X 6 X 1320	28 X 8 X 1000	37 X 10 X 850	37 X 10 X 1500	47 X 13 X 1320
22 X 6 X 830	21 X 6 X 1400	28 X 8 X 1060	37 X 10 X 900	37 X 10 X 1600	47 X 13 X 1400
21 X 6 X 850	21 X 6 X 1500	28 X 8 X 1120	37 X 10 X 950	37 X 10 X 1700	47 X 13 X 1500
21 X 6 X 900	28 X 8 X 670	28 X 8 X 1180	37 X 10 X 1000	37 X 10 X 1800	47 X 13 X 1600
21 X 6 X 950	28 X 8 X 700	28 X 8 X 1250	37 X 10 X 1060	47 X 13 X 960	47 X 13 X 1700
21 X 6 X 1000	28 X 8 X 750	28 X 8 X 1320	37 X 10 X 1120	47 X 13 X 1000	47 X 13 X 1800
21 X 6 X 1060	28 X 8 X 800	28 X 8 X 1400	37 X 10 X 1180	47 X 13 X 1060	
21 X 6 X 1150	28 X 8 X 850	28 X 8 X 1450	37 X 10 X 1250	47 X 13 X 1120	

NARROW BELTS (8V SECTION)

8V-990	8V-1310	8V-1600	8V-1990	8V-2230	8V-2500	8V-3150
8V-1050	8V-1350	8V-1700	8V-2000	8V-2240	8V-2680	8V-3350
8V-1110	8V-1390	8V-1800	8V-2090	8V-2360	8V-2800	8V-3540
8V-1240	8V-1500	8V-1900	8V-2120	8V-2490	8V-3000	8V-3940

BELT & PULLEY MEASURING TOOLS

PIX-PULLEY-GAUGE	PIX PULLEYGAUGE
LM1	BELT LENGTH MEASURER
LM2	RIBBED BELT MEASURER

Belt Length Measurer



Muscle (High Power - Low Maintenance) V-Belts



Finer Power Transmissions P/L | www.finerpt.com

PIX MUSCLE SPB SECTION					
MB-SPB-1250	MB-SPB-1800	MB-SPB-2500	MB-SPB-3550	MB-SPB-5000	MB-SPB-7100
MB-SPB-1320	MB-SPB-1900	MB-SPB-2650	MB-SPB-3750	MB-SPB-5300	MB-SPB-7500
MB-SPB-1400	MB-SPB-2000	MB-SPB-2800	MB-SPB-4000	MB-SPB-5600	MB-SPB-8000
MB-SPB-1500	MB-SPB-2120	MB-SPB-3000	MB-SPB-4250	MB-SPB-6000	
MB-SPB-1600	MB-SPB-2240	MB-SPB-3150	MB-SPB-4500	MB-SPB-6300	
MB-SPB-1700	MB-SPB-2360	MB-SPB-3350	MB-SPB-4750	MB-SPB-6700	

PIX MUSCLE SPC SECTION					
MB-SPC-2000	MB-SPC-2650	MB-SPC-3550	MB-SPC-4750	MB-SPC-6300	MB-SPC-8500
MB-SPC-2120	MB-SPC-2800	MB-SPC-3750	MB-SPC-5000	MB-SPC-6700	MB-SPC-9000
MB-SPC-2240	MB-SPC-3000	MB-SPC-4000	MB-SPC-5300	MB-SPC-7100	MB-SPC-9500
MB-SPC-2360	MB-SPC-3150	MB-SPC-4250	MB-SPC-5600	MB-SPC-7500	MB-SPC-10000
MB-SPC-2500	MB-SPC-3350	MB-SPC-4500	MB-SPC-6000	MB-SPC-8000	

PIX's overwhelming desire to be at the "cutting edge" in this field has culminated in the launch of the MUSCLE range of belts. Put simply, PIX MUSCLE belts are the ultimate V-belt – superhigh power rating, maintenance-free, and eco-friendly.

Years of consultation with customers, and taking into account the new requirements of the changing world we find ourselves in, has resulted in PIX providing the "perfect solution".

MUSCLE belts are produced to comply with the latest REACH directives, RoHS regulations, and exclude all restricted chemicals as listed by the EPA in the US.

The MUSCLE belt compound does not emit any toxic substances during manufacturing or when running in use.

The revolutionary design of the compound performs well in adverse conditions, such as high temperatures, UV or Ozone exposure, and chemically aggressive environments.

MUSCLE shows remarkable performance characteristics in terms of elongation and slippage – minimising energy loss.



Pulley Gauges

PIX Pulley Gauges are specially designed for checking the profiles of the grooves of various types of pulleys.

Groove Checking Procedure

1. Identify the pulley gauge to be used according to section and its diameter.
2. Measure the groove by inserting the gauge and identify if any clearance lies between the side wall of groove and the gauge.
3. Measure the present clearance using the Feeler Gauge.

Belt Length Measuring Device

PIX Belt Length Measuring Devices are used for determining the length of a belt when the size of the belt is not clearly visible. They can also be used to confirm the size of the belt. The maximum belt length that can be measured is 120 inches or 3050mm.

Groove Checking Procedure

1. Place the belt on the fixed upper half of the pulley.
2. Slide down the lower half of pulley until the belt is sufficiently stretched.
3. The markers on the lower position of the bottom half will show the belt length.



Belt Tension Tester

Proper belt tension is essential for optimum power transmission and vital to the life of the belt. To ensure optimum V-belt drive operation it is recommended to check the tension of the belts by measuring the deflection force value with the help of a tension tester.

Belt tension in most drives can be checked with adequate reliability by using the PIX tension tester.

Tension Measurement Procedure

Measure the span length of the belt in mm.

Tie a string on the two pulleys along with the length of the belt and mark the centre of the span on the belt.

Calculate 1.5% of the span ("x") for belt length less than 1000mm and 1% of the span for belt length more than 1000mm. Adjust the lower side of the bottom ring on the tension tester to coincide with "x" on the mm scale then adjust the lower side of the top ring to 0.00 N.


Place tension tester at the centre of the span of the belt. Apply force with the help of the tension tester perpendicular to the span until the lower surface of the bottom ring touches the string.

Take the deflection force value (N) by the lower side of the top ring.

Compare the deflection force value (N) with the values shown on the next page - the deflection force should be between the minimum and maximum values given.

Deflection force less than the minimum recommended value indicates an under tensioned drive.

Deflection force greater than the maximum recommended value indicates an over tensioned drive.

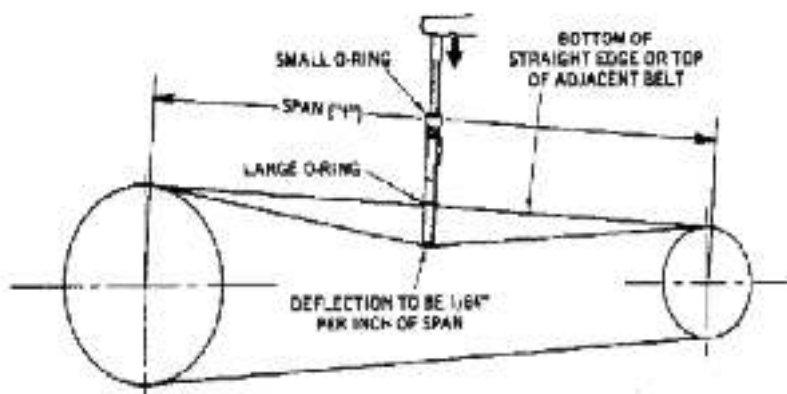

Important Notes

For new belts, deflection force value (N) should be kept at the maximum.

Maximum deflection force value (N) is recommended for pulsating & shock loads.

It is recommended to re-check the tension on new belts after approx. 24 hours of running and if necessary, adjust accordingly.

Deflection Force Required for Measuring Tension in V-Belt Drives								
Cross Section		Smaller Pulley Dia (mm)	Condition 1			Condition 2		
			Delfection @ 1.0% of span, if span length is more than 1000 mm			Delfection @ 1.5% of span, if span length is more than 1000 mm		
			Required deflection force F at the centre of span for belt speed			Required deflection force F at the centre of span for belt speed		
			0 m/s to 10 m/s	10 m/s to 20 m/s	20 m/s to 30 m/s	0 m/s to 10 m/s	10 m/s to 20 m/s	20 m/s to 30 m/s
			Range (N)					
Wrapped Belts	Classical Belts							
	M	50-100	4-6	4-5	3-4	5-8	5-7	4-5
		100+	6-9	6-7	5-6	8-12	8-9	7-8
	A	71-140	8-12	7-10	6-8	11-16	9-13	8-11
		140+	12-18	10-14	8-12	16-24	13-19	11-16
	B	112-200	16-24	13-19	10-16	21-32	17-25	13-21
		200+	24-35	19-29	16-24	32-47	25-39	21-32
	C	180-400	31-46	26-38	20-31	41-61	35-51	27-41
		400+	46-70	38-58	31-46	61-93	51-77	41-61
	D	315-600	62-90	52-76	42-62	83-120	69-101	56-83
		600+	90-134	76-115	62-90	120-179	101-153	83-120
	E	450-915	108-160	90-137	73-109	144-213	120-183	97-145
		915+	160-240	137-205	109-160	213-320	183-273	145-213
	Wedge Belts							
	SPZ	63-95	8-12	7-10	6-9	11-16	9-13	8-12
		95+	12-17	10-16	9-14	16-23	13-21	12-19
	SPA	90-140	14-20	12-17	10-14	19-27	16-23	13-19
		140+	20-31	17-26	14-22	27-41	23-35	19-29
	SPB	140-265	25-36	20-32	18-27	33-48	27-43	24-36
		265+	36-46	32-41	27-37	48-61	43-55	36-49
	SPC	224-355	46-66	38-58	32-52	61-88	51-77	43-69
		355+	66-85	58-76	52-70	88-113	77-101	69-93
	8V	335-520	81-107	68-90	56-73	108-143	91-120	75-97
		520+	107-167	90-140	73-113	143-223	120-187	97-151
Raw Edge Belts	Classical Belts							
	AX	63-140	9-14	8-12	7-9	12-18	11-15	9-12
		140+	14-21	12-16	9-14	18-28	15-21	12-18
	BX	90-200	18-28	15-22	12-18	25-37	20-29	15-25
		200+	28-40	22-33	18-28	37-54	29-44	25-37
	CX	140-400	36-53	30-44	23-36	48-71	40-58	31-48
		400+	53-81	44-67	36-53	71-107	58-89	48-71
	Wedge Belts							
	XPZ	56-95	9-14	8-12	7-10	12-18	11-15	9-14
		95+	14-20	12-18	10-16	18-26	15-25	14-51
	XPA	71-140	16-23	14-20	12-16	21-31	18-26	15-21
		140+	23-36	20-30	16-25	31-48	26-40	21-34
	XPB	112-265	29-41	23-37	21-31	38-55	31-49	28-41
		265+	41-53	37-47	31-43	55-71	49-63	41-57
	XPC	180-355	53-76	44-67	37-60	71-101	58-89	49-80
		355+	76-98	67-87	60-81	101-130	89-117	80-107

Belt Crossover: Narrow & Wedge Belts



Finer Power Transmissions P/L | www.finerpt.com



Belt Designation				Belt Designation				Belt Designation	
SPZ / XPZ	3V / 3VX	SPZ / XPZ	3V / 3VX	SPB / XPB	5V / 5VX	SPB / XPB	5V / 5VX	Metric	8V
630	250	1420	560	1250	-	2840	1120	-	990
670	-	1450	-	1260	500	2850	-	2540	-
710	280	1470	580	1320	-	2900	-	-	1050
750	-	1500	-	1340	530	2990	-	-	1110
760	300	1520	600	1400	-	3000	1180	2840	-
800	315	1560	617	1410	560	3070	-	-	1240
825	-	1600	630	1430	-	3150	-	3180	-
850	335	1650	650	1450	-	3170	1250	-	1310
875	-	1700	670	1500	595	3250	-	-	1390
900	355	1750	-	1510	-	3300	-	3550	-
925	-	1800	710	1520	-	3350	1320	3810	1500
940	370	1850	730	1525	-	3450	-	4060	1600
950	-	1900	750	1540	-	3550	1400	-	1700
975	-	2000	800	1590	-	3750	-	4570	1800
1000	-	2030	-	1600	630	3800	1500	-	1900
1010	400	2120	-	1650	-	4000	-	-	1990
1030	-	2140	-	1700	-	4060	1600	5080	2000
1060	-	2160	850	1750	-	4250	-	-	2090
1080	425	2240	-	1800	710	4310	1700	-	2120
1090	-	2280	900	1850	-	4500	-	5690	2230
1120	-	2360	-	1900	750	4560	1800	-	2360
1140	450	2410	950	1950	-	4750	-	-	2490
1150	-	2500	-	2000	790	4820	1900	6350	2500
1180	-	2540	1000	2020	800	5000	-	-	2680
1190	-	2650	-	2060	-	5070	2000	7100	2800
1200	475	2690	1060	2120	-	5310	-	-	3000
1220	-	2800	-	2150	850	5380	2120	8000	3150
1240	-	2840	1120	2180	-	5600	-	-	3350
1250	-	2990	-	2240	-	5680	2240	9000	3540
1270	500	3000	1180	2280	900	5990	-	-	3940
1280	-	3150	-	2310	-	6000	2360		
1320	-	3170	1250	2360	950	6300	-		
1340	530	3550	1400	2400	-	6340	2500		
1360	-			2410	1000	6700	-		
1400	550			2500	-	7100	2800	Finer Power Transmissions stock the metric range shown in bold. NB. This cross reference is for single belts only - banded belts cannot be interchanged.	
				2530	-	7900	-		
				2640	1060	8000	3150		
				2650	-	8500	-		
				2680	-	9000	-		
				2800	-				